



Di Di Northrop, oldest of the two Northrop girl type offspring, poses with her Dad's latest design.

Cabin type machine is covered with new Super Monokote and uses Kraft Gold Medal KP-6B.

THE APPRENTICE

Designed specifically for the beginner or newcomer to R/C, the Apprentice permits all the normal errors of building and flying and still has that extra something for the good flight.

Clean and simple lines of the Apprentice can be seen in this above-the-head view. Windows

are very easy with the Monokote. New AMA regulations permit license number on the side.



By BILL NORTHROP

► The Apprentice was designed specifically for the model builder who has decided to move into radio control. It was particularly designed for the beginning R/Cer who is located in a low R/C activity area and who will not have the help of an experienced pilot during the first flights.

On the other hand, the Apprentice is the perfect ship for the veteran R/Cer to build for his young son who is showing that significant gleam of interest in his eye. And by the way, if your wife or girl friend has finally given signs of resigning herself to her fate and wants to "try it sometime," build her a pink Apprentice and put curtains in the windows.

To suit the above requirements, we felt the ship needed an important design factor that has been left out of most present day "trainers." The plane should be large enough, and light enough, to fly steadily and slowly, giving the new pilot time to think about his next control movement.

This design consideration also provides another important factor missing in most so called "beginner's" airplanes. It is no particular problem for an experienced flier to have a somewhat badly trimmed airplane on its first flight, but the beginner has three strikes against him right at the start: an untried airplane, an untried radio (the bench and the air seem to be unrelated as far as radio operation is concerned), and an untried pilot. A large, lightweight airplane will permit test gliding, an almost forgotten art as applied to R/C. Through a series of test glides, the plane, the pilot, and the control system all have a chance to become acquainted with each other under less strained conditions, so that when the big moment occurs, that first powered flight, there is a better chance of survival all around. Most any experienced R/C pilot, if he's willing to admit it and can accurately recall his first controlled flight, will go along with this.

Another point in favor of a large, light airplane like the Apprentice is that it will take almost any kind of radio equipment. If the new R/Cer is fortunate enough to be able to afford a multi proportional system, there is no need to feel obligated to install it in a typical multi bird for his first flying lesson, nor should he feel obliged to work his way up through the single channel route. In the long run, if you are pretty sure of ending up with multi propo equipment, it would actually be cheaper to start out with it. Work your way up through the airplanes, not the radios.

On the other hand, the Apprentice will be perfectly at home in the air with reeds, with single channel decoded systems, with Galloping Ghost, pulse rudder (a

APPRENTICE

little too big for magnetic actuators), and motorized or rubber powered escapements.

We were asked if ailerons could be put on the ship, and this brings out another key point of the design, the inherent stability. Even Webster's old 1941 Collegiate Dictionary has that one figured. Webster says inherent stability is the "firmly infixed (inherent) property of a body which causes it, when disturbed from a condition of equilibrium or steady motion (stability), to develop forces or moments which tend to restore the body to its original condition." In other words, the Apprentice, like any properly trimmed free flight model, will take care of itself in the air. If you disturb its otherwise tranquil flight by applying rudder and/or elevator, it will respond by going left or right and/or up or down, *but*, as soon as you neutralize controls, and with most systems this means releasing the stick(s), toggle(s), or button(s), the Apprentice's inherent stability will take over and return the ship to normal flight—a comforting thought if you're a tyro and get yourself in a jam.

Now, about those ailerons. The inherently stable airplane will respond nicely to elevator and rudder controls, but it has rather fixed ideas about being induced to roll with ailerons. In many I.S. designs, the plane will actually yaw in the *opposite* direction from the aileron control given! The cure for this is to make the airplane *unstable* about its longitudinal axis, or fuselage centerline. The simplest way to do this is to drop the dihedral. In fact, without even resorting to ailerons, you can increase the maneuverability of an airplane (also increase its instability) by lowering the dihedral somewhat. However, now the airplane will require constant control corrections to keep it in level flight. It cannot take care of itself and will crash if the pilot does not make up for its lack of stability.

This type of instability is not bad. It's a necessary ingredient of airplanes designed for maximum stunt capability, but the beginning flier needs this like a hole in the head. Until you can take off, fly around for ten minutes, land, and be perfectly relaxed and on top of the whole situation from beginning to end, you're not ready for an airplane that demands constant "second nature" attention throughout its flight. End of sermon.

We had originally planned to include flying instructions in this article, aimed at the individual who does not have access to the assistance of an experienced pilot. Before we knew it, a separate article was developing. It just can't be done in a few words. So, get busy now and build the Apprentice. We'll get you into the air next month.

CONSTRUCTION


WING: Although the wing has our own SSS302 airfoil (Somewhat Semi-Symmetrical. The 302 is our Area Code), it can and should be constructed on a flat, true surface. The section is actually straight on the bottom from the spar on back. Washout is built into the outer, twelve inch tapered portion of each panel.

After covering the wing plan with Cut-Rite or Saran plastic film, begin construction by pinning down the bottom trailing edge of the inner straight portion of the wing in addition to the bottom 1/4 inch square spar. The latter must be blocked up off the board with scraps of 3/32 inch balsa. Angle the spar hold down pins toward the rear so they will not interfere with installation of the top spar and leading edge sheeting that comes a little later.

Glue and pin in place ribs W-1 through W-3, tilting W-1 with the root rib dihedral jig. Don't glue the outer W-3 rib to the trailing edge just yet. Now glue and pin down ribs W-4 through W-7. Next, prefit and then slide in place the tapered tip portion of the bottom trailing edge. Apply glue only after it is in place. Also, the outer W-3 rib can now be glued over the




It's 25 degree weather and 25 mph winds, a typically lovely day to fly. This view shows high aspects ratio wing, long tail moment arm, both very good trainer characteristics. Wasn't easy to hold for photo in high wind.

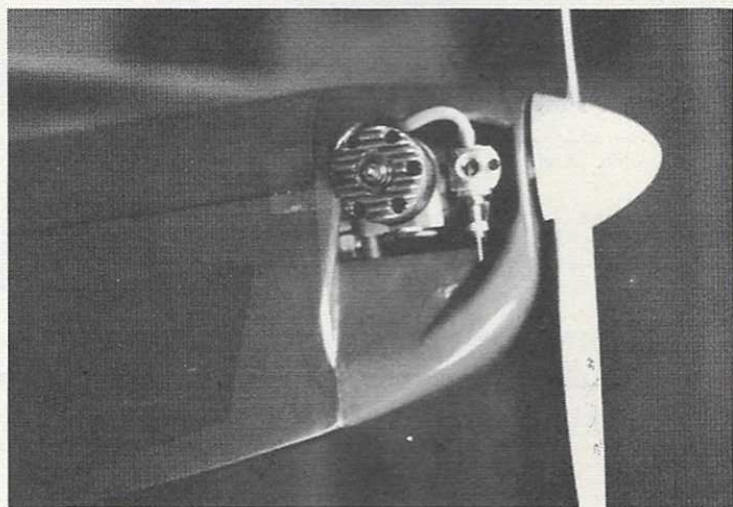

Side mounted Webra .20 R/C with 6 ounce tank will stay up all day. In-visible mending tape is practical hatch holder. Fill tank thru fuel feed line.

Below is a close-up of the simple, neat servo installation. Note jog in throttle control pushrod, close or stretch bend for throttle adjustment.

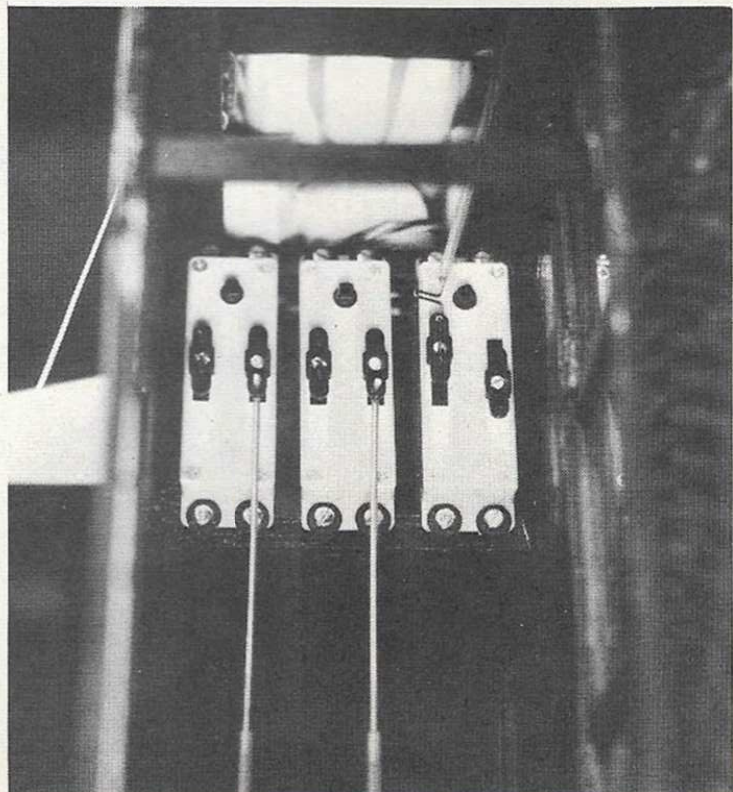

Tatone Products

CLOCKWORK TIMERS

All fuel timers \$4.98 each
D-T Tick Off \$5.50 each
Surgical tubing 20¢ ft.



RADIAL-BEAM ENGINE MOUNTS

CLASS	BEAM LENGTH	PRICE
1/2A COX	LONG OR SHORT	\$.15
.09	SHORT ONLY	1.75
.15	LONG OR SHORT	1.75
.19	LONG OR SHORT	1.75
.29-.40	LONG OR SHORT	2.00
.45-.59	SHORT ONLY	2.50
.60	LONG ONLY	3.00
.60	SHORT ONLY	2.50



FIXED GEAR MOUNTS

F/F	LANDING GEAR INCLUDED	PRICE
.15		2.00
.19		2.00
.29-.35		2.25



TANK-MOUNTS

1/2A COX	\$2.85
CL. .09	3.00
CL. .15	3.00
CL. .19	3.00
CL. .29-.35	3.50

NEW
Larger Capacity Tanks

NOTE: specify engine and disp. for any mounts when ordering.

NEOPRENE DISCS 1/2A LANDING GEAR KIT

1/2A	25¢	FITS TATONE
.09	30¢	1/2A ENGINE
.15	30¢	MOUNT.
.19	30¢	
.29-.35	35¢	85¢
.45-.60	35¢	PER KIT
.60-.74	40¢	




STOP WATCHES

Swiss made-jeweled movements. Unbreakable crystal. Dust protected. Anti-magnetic. Chrome cases.
1/5 or 1/10 second \$18.50



R/C STEERABLE NOSE GEAR KITS

BELLY MT. KIT	\$4.95
BULKHEAD MT. KIT-1	4.95
BULKHEAD MT. KIT-2	4.95
ENGINE-MT. KIT	5.95

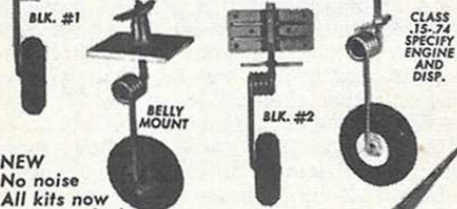

NEW
No noise
All kits now
Teflon Bushed

CLASS
.15-.74
SPECIFY
ENGINE
AND
DISP.

SPEED PANS

CL. 1/2A	\$3.50
CL. 1/2A PROTO	3.50
CL. A	4.25
CL. B	4.50
CL. B PROTO	3.95
CL. C	4.95



New Beefed up 1968 models

ADJUSTABLE PITCH PROPS

"INSTANT PITCH"

10" DIA.	\$1.95	REPLACEABLE BLADES
11" DIA.	1.95	85¢ each

Perfectly balanced—no vibration

SCALE INSTRUMENT KITS

RIM DIAMETERS AND KIT SIZES:
1/4"—5/16"—3/8"—7/16"—1/2"
\$1.75 per kit



R/C HINGES

AMA SAFETY RULE NUT

NEW
No noise
Best by test
For GG and Multi

34¢ PR.

1/4" or 5/16" SHAFT SIZES
95¢ each

SAVE THOSE FINGERS
"CHICKEN STICKS"

ONLY
69¢ each

NOW AVAILABLE AT ALL DEALERS

If no dealer is convenient order direct
Add 25¢ for postage and handling
Add 15% for AIR MAIL postage
Send 25¢ for descriptive catalog

TATONE PRODUCTS

DEPT. M, 4719 MISSION ST.
SAN FRANCISCO, CALIF. 94112

The Apprentice

butt joint of the trailing edges.

Put glue in the notches and press the top 1/4 inch square spar in place. Next, add the 1/8 inch thick sub-leading edge. The top of this strip should be beveled before putting it in place. Incidentally, if you're using a runny glue such as Titebond, adding the sub-leading edge can get messy since the glue will be dripping off some of the ribs before you get them all coated. Try this: lay the strip back side up on top of the ribs, and where it crosses each one, apply glue to the strip. Now pick it up slap it on the front of the ribs, and pin it in place.

While this is drying, pre-fit the top trailing edge pieces. Using a ball point pen, mark the bevel line on each piece, and with a razor plane and sanding block, bevel the edges down to about 1/32 inch thick. Remove any pins that may interfere and glue and pin the top trailing edges in place. Titebond is not too good here because its moisture content tends to relax the wood fibers and causes the edge to curl, making pinning difficult. Either go to a cellulose cement, or counteract the Titebond curl by moistening the top side of the sheet.

The last item that may be added before

SEND for your free CATALOG

BIG SAVINGS ON ALL TOP BRANDS OF AIRPLANES, BOATS, ENGINES AND ACCESSORIES... including Radio Units and Components.



DISCOUNT HOBBY DISTRIBUTORS

P.O. Box 24876 Dept. C Los Angeles, Calif. 90024
Phone (213) 477-0046

NAME _____

ADDRESS _____

CITY _____

STATE _____

ZIP _____

Goodbye silk—
Goodbye everything!
coverite
makes all known
covering fabrics
obsolete!

NO GLUE — JUST LAY IN PLACE,
IRON, TRIM!

100 TIMES STRONGER THAN SILK—
SAVES 75% COVERING TIME—COSTS
50% LESS BECAUSE IT SAVES COATS AND
COATS OF PAINTING—NEVER, NEVER,
NEVER SAGS, BAGS, WRINKLES OR CRINKLES—
NOT EVER!



\$2.95

22" x 40" sheet

TRY IT ON US—FREE—We'll PATCH YOUR NEXT PUNCTURE!
We'll send you a sample of COVERITE large enough to patch
your next puncture in your fabric-covered model. Send a
self-addressed, stamped envelope to: COVERITE



NO R/C FLYER SHOULD
BE WITHOUT ONE...

COMMAND MASTER
FEEDBACK PROPORTIONAL 3+1 SYSTEM-RTE

AIRBORNE PACKAGE AS ILLUSTRATED ONLY 15 OZ.

\$250 Transmitter including Nicads • Battery Charger
Receiver including Nicads • Three (3) Servos
Servo Connector Switch Board

Dual Unconditional 5-Year "Black Box" Guarantee
Repair or replacement Receiving pack—\$9.50; Servo—\$7.50 each.

R/C BEGINNERS! Start with Command Master RT-1000 and your
R/C investment will be protected. The Command Master
RT-1000 is a basic R/C building block. Convert it anytime to the
feedback proportional 3+1 RTE system for just \$125.00.

Complete system (less transmitter batteries)..... **\$125**

BALSA CORPORATION OF AMERICA

BELFIELD & WISTER STREETS

PHILADELPHIA, PA. 19144



ALL-AMERICAN
Hobby Accessories Since 1937

NEEDLE VALVES

- No. 437 Universal
- No. 436 Uni-Flex
- No. 433 Tiny- Uni-Flex

FUEL PUMPS

America's most popular fuel pump. All metal—built to last!

- No. 003 1/2 Pint size
- No. 004 Pint size
- No. 005 Quart size

GLUE GUNS

For fast, neat application of glue, cement or lubricants. Finger-tip control.

- No. 545 A/C Standard
- No. 565 NEW Compact
- No. 560 Deluxe Gun with Fine, Medium & Coarse Tips

4 WAY WRENCH

Protects plugs, porcelain and cylinder fins. Four sockets - 5/16", 3/8", 7/16", 1/2"

Cat. No. 227

A-C TIMERS

- No. 331 Large Timer 3/4" x 1 1/4"
- No. 329 Baby Timer 3/4" x 1 1/2"
- No. 330 Timerette 3/4" x 1 1/2"

A-C FUEL-OFF TIMER


Cuts off fuel supply on 1/2A, A, B, and even C motors.

BATTERY HOLDERS

a size and type for every need.



- No. 106 Pencil
- No. 107 Med. Cells
- No. 110 Lge. Cell
- No. 108 Lge. Cells



"TEETER-PROP"
for satin-smooth performance of all model airplane engines...
Easily, quickly, expertly, balance wood or plastic propellers. Also, balances racing car wheels and motor armatures.

Cat. No. 044

Catalog on Request
AUSTIN-CRAFT CO.
P. O. BOX 207 / KINGMAN, ARIZONA.

removing the panel from the board is the top leading edge sheeting. Use plenty of pins and wipe the outside surface with a damp cloth just prior to installation in order to ease the bending strain. Butt the sheet tightly against the rib notches and allow the excess to extend beyond the sub-leading edge. Let this much of the assembly dry over night.

After removing it from the plan, turn the wing over and pin it down by the top spar. Slide a jig strip of 1/4 inch square material under the wing until it blocks up the trailing edge, keeping the wing from rocking. Make sure the jig strip is parallel to the spar, then pin everything down tight to keep the wing straight. Now install the webbing in front of the wing spars, followed by the bottom front sheeting. Of course, that sub-leading edge has to be beveled off first.

Once the webbing and bottom sheeting are in place and the glue has hardened, the wing is beyond the point of no return so far as its straightness is concerned. Eyeball it from every possible angle to make sure there are no permanent "warps."

Repeat all of the above for the other wing panel, and for heaven's sake make sure it's opposite hand! An easy way to do this when you have only one half of the wing plan is to rub oil into the critical locating points on that half. This makes the paper transparent enough at these spots to turn the plans over and build the second panel on the back side. The final steps before joining the two panels are trimming off the building tabs on the tip ribs, and gluing the 1/4 by 1/2 inch leading edges in place.

Using a large sanding block, dress the root end of each wing panel so that you will obtain a smooth, uniform butt joint at the center. Pin one panel to the building board with the bottom spar and trailing

edge held down securely (Stick some of that Saran under the root rib). Apply glue to the root section of the other panel, press it into place, prop the tip up 6 inches (to the bottom of W-7) and pin the center joint together at the leading and trailing edges to maintain alignment. Allow this to dry thoroughly.

Make room for the dihedral braces by slicing out that portion of ribs W-1 and the inner W-2 which is between the spars and the trailing edge. Epoxy the braces in their respective locations and then trim and reinstall the ribs. Scrap sticks may be sprung between the trailing edge and the main brace to hold it in position until the epoxy hardens. Finish the wing structure by adding all of the tip and center section sheeting and the tip blocks. The vortex design is optional and has not been proven for better or worse on this model.

TAIL: Carefully select all tail section wood for lightness. An extra ounce in the tail will require adding three ounces in the nose to balance the airplane, and that's a useless 1/4 of a pound that nobody needs.

The basic 1/4 inch thick stabilizer frame is first built right over the plan. While it is pinned down, you can add the top 3/16 inch main spar, the 1/8 inch tip fillers, and the 3/16 inch center section fillers. Leave a 1/4 inch slot for the fin.

Once this much is dry, remove all pins holding the 1/4 inch square spar and leading edge and add the 1/16 by 3/8 inch spar caps. Purpose of the caps is to provide a smooth, uninterrupted surface from outside edges to center spar and to avoid the annoying little covering kinks that usually form as ribs try to push into spars under tension of the covering. When stab is dry, remove from plan and add bottom spar, filler pieces, and caps. Plane and sand everything to shape for covering.

RAND has the *pulse* of the hobby!

The GG PAK and DUAL PAK.

With these two packaged systems, we've about covered the field of single channel pulse proportional.

For your convenience.

All wiring and matching of motors, circuitry and batteries is done for you and neatly designed into a compact package.

The systems are small.

And reliable.

The GG PAK is a great starter system.

3 controls from 1 actuator.

The most flying for the least money.

And the most in flying for fun.

The next step is the DUAL PAK.

3 controls from 2 actuators.

It operates at higher pulse rates.

For those who want a wiggle-free system and no interaction of controls.

Your favorite radio manufacturer is marketing equipment compatible with both the GG PAK and DUAL PAK.



#6040 GG PAK... \$39.90



#6080 DUAL PAK... \$75.00

We also have a full line of accessory items. Write for our catalogue with detailed descriptive material. Enclose 20¢ for handling costs.

RAND

MANUFACTURING CO., INC.

8909 HUBBELL AVE., DETROIT, MICH. 48228

The fin is built from 1/4 inch materials and needs no further explanation. The rudder and elevators are simple solid sheet material and only require the addition of ply inserts for control horns. Note that the elevators are only rounded at the trailing edge, not tapered to an airfoil shape as is the rudder. One package of No. 1023 Rand hinges swings the whole tail assembly.

A suggestion. If you plan to use a bang-bang control system, that is one that gives momentary applications of full surface deflection, such as escapements and multi reeds, you should start out with about half of the rudder area shown, or at least limit movement to about a 1/2 inch each side of neutral.

FUSELAGE: The fuselage is of typical sheet wood box construction. Hobbypoxy II was used on all doublers, Sig Epoxy glue on all heavy duty points, and Titebond for anything else. Doublers, upright stiffeners, and longerons are all added before joining the two sides. The top longerons of 3/16 square may need a series of partial saw cuts to help them follow the curve.

Proper and square alignment in early construction stages is important, so with this in mind, do not, repeat, do *not* cut out the window area (if you do it at all) until the fuselage is just about completed. Join the two sides by epoxying F-7 and F-8 in place. We temporarily pinned a six inch wide sheet of wood across the bottom of the fuselage between F-7 and F-8 to keep things true until the epoxy cured.

Next, cut two 3/16 square by 2 7/8 inch long cross pieces and glue and pin them in place at the vertical stiffener location which is 12 inches aft of F-8. Pull the tail posts together and bevel the inside surfaces until the total width of the two sides at the post is a little over a 1/4 inch. When this is glued together, the rear fuselage assumes a natural curve from F-8 to the tail post. With 3/32 balsa applied crossgrain, plank the top from elevator cut out to F-8 and the bottom from tail post to the 3/32 ply landing gear base. Also epoxy this in place. Use a 4 inch wide piece of planking just aft of F-8 on the top and score the underside down the middle so it will press into the "V" at the top of F-8 and gradually blend out to a flat section.


Epoxy F-1 into place using 1/4 by 1/2 inch spruce sticks with rubber bands stretched across them to hold the sides tightly against the bulkhead. Force pins through the sides and into F-1 to prevent sliding. Next, epoxy in place the tank floor F-9 and F-10 "instrument panel" bulkhead F-6. Another set of sticks and rubber bands just ahead of bulkhead F-6 should cozy everything up nice and tight.

While this is curing, you can glue in and carve the upper windshield block, drill out for the 1/8 inch dia. music wire wing dowels, and prepare the various ply pieces that are then epoxied in place along with the wire dowels. If you want the little extra touch of realism afforded by real honest see-thru windows, cut the balsa siding out now, guided by the ply doublers. Notch out the outer sheet sides as shown to accommodate the hardwood 3/32 by 1/4 vertical dividers. Since we used Super Monokote, the job of applying "glass" was easy. The sides were covered, including the window area, with one chunk of the instant skin. The S.M. was ironed down around each window frame, and then using cotton sticks and Kleenex, the color/adhesive was removed from the clear plastic backing film from inside the cabin. Presto! Daylight!

Meanwhile, back at the schnozz. . . . Glue in F-5, the hatch stop F-4, the short 1/4 inch square stringer from F-5 to F-6


FAIR-IT—Neatly fairs pushrods into fuselage or wing and eliminates push-rod drag. Available in three sizes:

- #F-1 Large
 - #F-2 Medium
 - #F-3 Small
- Package of 4 pcs. only 59¢



ANTEN-AWAY—Vertically polarized antenna. Fully retractable. Always electronically connected.


==209 Complete system only \$2.00



PROTECT-IT—Package includes:


- 4—Pushrod exit guides
- 4—Control horn plates
- 1—Slide-switch plate
- 1—Micro-switch plate

==PT-1 Package of 10 pcs. only 59¢




PLANEMATE—This all purpose chest has folding legs and handle. The PLANEMATE is perfect for field & shop, equipped with adjustable supports to hold any size model

Kit FB-1: \$22.95
Fully Assembled
FB-2 \$39.95



WING-AWAY—Easy to assemble storage unit of mahogany plywood. Mounts on wall and can hold four wings of any size.

WING-AWAY (WR): \$4.95



At your dealer or for post-paid delivery, send check or money order to:


More-Craft Products Company
Higginsville, Missouri

DEALER INQUIRIES INVITED
Missouri Residents add 3% Sales Tax

MORE-CRAFT
MORE PRODUCTS FOR MORE ENJOYMENT

MODEL AIRPLANE NEWS presents
the BEST of

PRICE
\$2.00

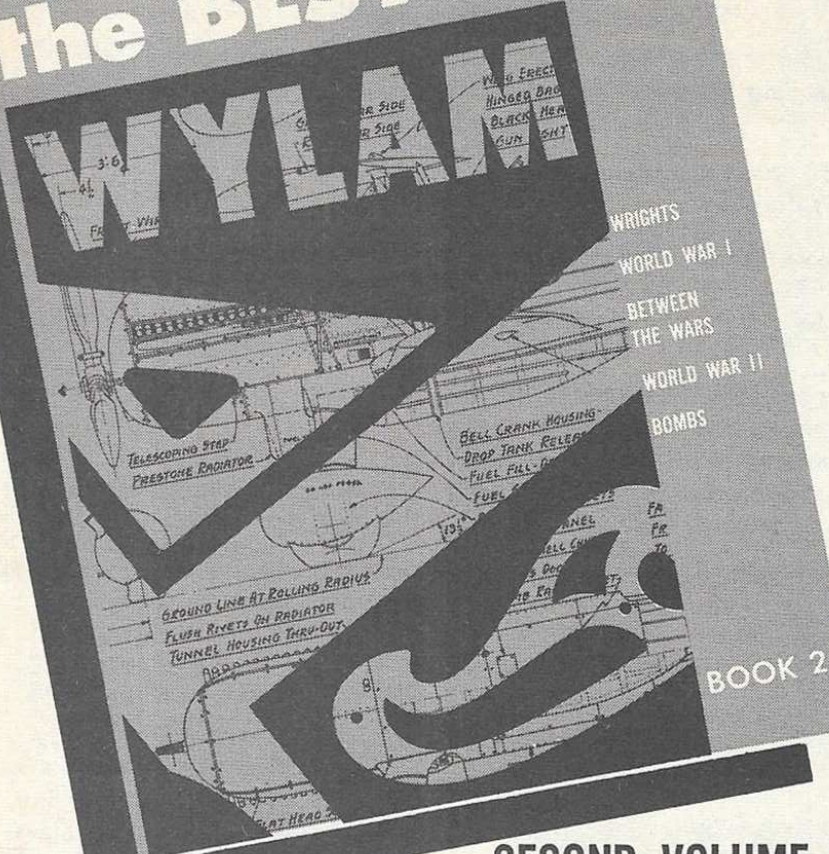

SECOND VOLUME
Superb Wylam Classics!

FROM THE PRICELESS COLLECTION OF WILLIAM WYLAM MASTERPLANS! In Book Form for the First Time! These Rare and Incomparable Records of Early Aviation are finally available to the Full Scale Aviation Enthusiast, and the Modeller who seeks perfection in depth! NOW YOU CAN OWN THE ULTIMATE DETAIL of Wylam's impeccable drawings with such treasures as the Wright Brothers Model A and Model B; the real beginning! And then the Rapid Coming of Age in World War I—depicted in this Volume by such Classics as the deHavilland DH-1, the Spad 7, plus the Albatross D-1 to D-5 . . . Aviations' Evolution between World Wars I and II is represented by the Curtiss P-1 series, including the Curtiss P-6E and F11C-2 the Northrop A-17A, Hawk 111C and the Vought V-143. Also You will find the never to be forgotten Ford Tri-Motor in this section and the Lockheed Vegas, Sirius, Altair, and Orion! From World War II are exquisite plans for the Curtiss P-40D, the Spitfire 11 and the Messerschmitt ME-109J. Bombs of World War II are included . . . AVIATIONS' GLORIOUS HISTORY COMES ALIVE IN THESE PAGES! BE SURE OF YOUR COPY! ORDER EARLY! ORDER NOW!

Book Number One Still Available—Only \$2.00
BUY BOTH PLAN BOOKS FOR ONLY \$3.50 WITH COUPON BELOW!

Contains plans of Bristol Fighter, Sopwith Dolphin, Bleriot, Avro Lancaster, Grumman F3F, 1, and 2. Also Boeing P-12 series, Great Lakes Trainer and Lysander. Rare detailed drawings of Vickers and Lewis machine guns and Cyclone, Twin Wasp, Whirlwind, Hispano-Suiza, Clerget, Mercedes engines. Thousands of these books have been sold! SUPPLY DEFINITELY LIMITED. Order now!

MODEL AIRPLANE NEWS • 551 FIFTH AVE. • NEW YORK, N.Y. • 10017

<input type="checkbox"/>	Enclosed \$2.00 FOR NEW PLANS NUMBER TWO	NAME _____	PLEASE PRINT
<input type="checkbox"/>	Enclosed \$2.00 FOR PLANS NUMBER ONE	ADDRESS _____	
<input type="checkbox"/>	Enclosed \$3.50 FOR BOTH PLANS NUMBER ONE AND NUMBER TWO	CITY _____	
		STATE _____	ZIP # _____

• OUTSIDE U.S.A. AND CANADA, PLEASE ADD 50¢ TO ABOVE PRICES.

and then plank the windshield cowl. We did this with two pieces which were first well soaked in hot water and taped into place over the bulkheads. When dry, it was an easy matter to trim them to shape and glue in place with only a few pins necessary.

Now construct the removable hatch framework right on the fuselage, using three ¼ inch square stringers and bulkheads F-2 and F-3. You may want to insert pieces of Saran before gluing, so the hatch won't become a permanent part of the structure. After trimming the side stringers, the hatch frame was sheeted in the same manner as the windshield cowl. Don't forget the ¼ inch overhang on each end.

The exact engine cowl construction will vary, depending on the engine used and whether it is mounted upright or tilted to the right. We mounted the Webra .20 turned 90 degrees to the right. Whatever you decide, remember that the center of the fuel tank should be at the same level as the engine's needle valve. If mounted upright, you will probably have to drop the thrust line slightly, and as a result, may need a little more downthrust. We have long been in favor of radial mounting, and suggest either a Tatone mount, Midwest "T" bars, or an aluminum plate bolted directly to the back plate of the engine.

We left the bottom nose planking until last, in case your engine mounting required blind nuts below the tank floor. Now this can be cross grain sheeted with hard ½ inch balsa. Obviously, it must be feathered down to 3/32 where it meets the ply landing gear base, but the idea is to prevent the battery pack from exiting the hard way (through the bottom) if you should plop down ungently.

Getting back to the cowl, the construction shown is fairly simple and can be adapted to any engine. Let your engine determine the location of the ⅛ inch ply nose plate. Cut a chin block and left cheek to suit, install all three and then fill in the curved top portion with wedges of ¼ inch sheet. Note the caved in right cheek designed to deflect exhaust from the side mounted engine.

At this point, mix up a large batch of Hobby epoxy II or Sig Epoxy, thin it to a pasty brushing consistency with dope thinner, and pour a big blob of it into the aft end of the tank compartment. Slowly rotate the fuselage until you're sure the unreachable area is well covered, then brush out the rest until the tank compartment is completely coated. Do the same with the engine cowl and the hatch.

RADIO INSTALLATION: As with flying instructions to a beginner who will not have the help of an experienced pilot at hand, a long book could be written on proper radio installation. There are so many different systems that can be used with the Apprentice, single channel escape-ment or pulse, reeds, or feed back proportional, that there just isn't room on the plans or in this text to describe how to install all of them. The original airplane is presently equipped with a new Gold Medal Kraft KP-4, which fortunately is the only radio at our field on 53.4, what with a six ounce Sullivan tank and a .20 cubic inch engine. Talk about long trips! The KPS-9 servos are mounted three abreast just aft of F-7 on ⅜ inch square mahogany cross bearers, and the motion is transmitted by Ny-Rods. Balance is right on the mark, without extra ballast needed. The 500 mah pack is about two inches in back of F-1, followed immediately by the receiver.

Total weight, ready to fly, with empty tank, is three pounds, eleven ounces. The experimental, semi-transparent, blue and

yellow Super Monokote undoubtedly contributed to the low weight, and plug number 2, the whole ship was covered in about three hours. Having diddled with this stuff for about three years now, we've learned there's a place for everything. Don't try to fight it into cowls or around complex nose shapes, or into concave vortex tips. An occasional "fix" of dope fumes is good for every modeler.

If you desire, and are unable to obtain help in installing your particular radio equipment, send me a stamped, addressed envelope, along with a description of the radio and actuators you plan to use. I will send you a tracing paper overlay of the installation I would recommend.

Good luck with the Apprentice, and here's to your early promotion to Expert.

MESSAGE TO "APPRENTICE" BUILDERS—NASCO DIE-CUTS AND DRAWING KITS

The Apprentice marks the first of what we hope will be a long series of "Die-Cuts and Drawing" kits based on M.A.N. R/C construction projects. Included in the combination offer, available from one source, is a set of the regular M.A.N. plans, along with top quality die-cut balsa parts, such as ribs, bulkheads, tips, etc. Also included are full size paper patterns of fuselage sides, control surfaces plywood parts, etc. For the present, at least, and to keep package size and cost down, fuselage sides, sheet and strip wood, and plywood parts will not be furnished.

Those desiring plans only should order in the usual fashion through M.A.N.'s New York office.

This first Die-cut and Drawing set is now available through your R/C editor, operating as Northrop Aeromodeling Supply Company (NASCO), 56 Holly Lane, Newark, Delaware, 19711. The Apprentice,

Kit DD-1, sells for \$5.95 post paid. For Special Handling, add 25¢.

FOX FUELS

FOX SUPERFUEL — Featuring PLUS Lubrication 28% Oil 5% Nitro Pt. 95¢ Qt. \$1.69 Gal. \$5.95
DUKE'S FUEL — Blended especially for the R/C and Sport flying of today! Low residue, idle additives 15% Nitro Gal. \$5.95
MISSILE MIST — The Fuel with GO-POWER 25% Nitro Pt. \$1.10 Qt. \$1.85 Gal. \$6.50

FOX GLO PLUGS

The Glow Tells the Story—Light up a Fox Glo Plug—Now check any other glow plug. Notice the brighter Fox glow... This is why Fox Glo Plugs start quicker and run faster.

FOX STANDARD SHORT	49¢
FOX STANDARD LONG	49¢
FOX HEAVY DUTY LONG	75¢
FOX R/C SHORT	75¢
FOX R/C LONG	98¢

FOX MANUFACTURING COMPANY
 5305 TOWSON AVE. • FORT SMITH, ARKANSAS

***** Serving The R/C Hobbyist Since 1953—Prompt Delivery Our Specialty *****

ACE R/C

PULSE PROPO IS HERE

ACE IS THE HEADQUARTERS—for single channel proportional—dependable performance yet easy on the pocket book. We have our GG package, the new Simpro III, the Rand Decoder and other systems. Check our American Modeler ad for more listings than shown here... We've been supplying the hard to get items to the do-it-yourself since 1953. If you are interested in Quality and Service—We're here to serve You.

COMMANDER TRANSMITTER KIT

Designed by Phil Kraft. It is essentially the same as the KT-1 which sells for \$29.95 when assembled. Over 500 mw input. Requires Class C CB license. Domestic antenna, base loaded, removable with power packed non-directional punch! This unit uses one 9 volt battery of Mallory 1603 type for long economical operation. May be used with Commander Pulser Converter Kit for proportional. Completely ready for easy assembly. Just add battery and you're ready!

NO. 11KD41, \$19.95

COMMANDER PULSER CONVERSION KIT

This Kit enables you to convert your present Commander for a rudder only pulse... The normally off pushbutton switch can be used for escapement flying. Rudder only pulser features unijunction and silicon transistors for complete temperature stability. This pulser with a Commander transmitter will let you get rudder only with auxiliary motor control flying. Pulser may also be used with KTX1 Kraft single channel transmitter. Convert now to Real Flying Pleasure!

NO. 15K51 \$8.50

MARKS BASIC VERSAPULSER KIT

The Versapulser is a revolutionary design as up to date as tomorrow. Features a rate adjustment that allows it to be used with ANY pulse system that is on the market today. It is linear over the entire range and no interaction pulse rate is completely variable from 2 to approximately 50 pulses per second. This means it can be used with magnetic actuators, Rand and other types of actuators, Rand Dual Packs, Simpro, and other decoders that require the faster pulsing, including the ones that use feedback servos. No other pulser is available today that is as capable of this broad rate range, and yet still feature complete linearity and less interaction, than any pulser in use... Secret is a linear stabilizer, which was developed by Fred Marks, and which is an Ace exclusive priority design... Basic kit is offered two ways so it may be easily adapted to any existing tone transmitter. With tone key in negative side (Mule, etc.), you need Model NPN. With keying in positive leg (Commander, Kraft, etc.), you need Model PNP... Basic kit contains all components such as resistors, capacitor, printed circuit board, all transistors and diodes. Base measures 1 3/4 x 1 1/16 inches, so it may be fitted into a very small space inside your case. Uses same 9 volt battery. Versapulse Kit does not contain: Pots, switches or stick assembly. Pots required for the stick are .25K for width, 10K for rate, and 5K is required for rate adjustment. No. 15K49—Marks Basic Versapulser Kit, PNP, \$12.25. No. 15K50—Marks Basic Versapulser Kit, PNP, \$10.75.

ADD ON SWITCHER KIT

Take the first letter of the above title and you have the AOSK. This converts a relayless receiver so that it can be used with dual coil actuators, such as the Adams, and use only one set of batteries (nickel cadmiums recommended) for BOTH receiver and actuator. This is quite a saving in weight and bulk. The AOSK contains all necessary components and drilled epoxy PC base. May be encapsulated and mounted on your actuator or batteries.

NO. 15KB1—Add On Switcher Kit \$1.95

NEW! SMALL! ADAMS BABY ACTUATOR

From Adams Manufacturing comes the Adam Baby Actuator. This Baby uses an entirely new magnet which develops more torque, so that in spite of its small size, you have more than ample power for .020 and larger equipment... The unit measures 1" x 1 1/4" x 1 1/4". Weight is only slightly over 1/2 ounce... Torque rod installation must be used with this for adequate power... Unit draws about an average of 110 ma, which means that batteries of the 225 ma size are more than adequate to power the unit on 2.4 volts. Use with relayless receivers to which an AOSK has been added.

NO. 14K15—Adams Baby Single Actuator \$6.95

E R D—ELEVATOR RATE DECODER KIT

Add elevator to your rudder only propo job easily and efficiently. This Elevator Rate Decoder design by Dennis Jaacks is an electronic device capable of "reading" rate information from your pulse transmitter and translating it into up and down signals for an extra elevator actuator. Designed for Adams actuators, may be used in ships up to .19 size. Must be used with transmitter that will allow setting of the width to at least 80/20 or more width ratio and have pulse rate speeded up for a neutral of about 10 to 12 pulses per second. (Most GG transmitters may be modified for these widths and rates.) Your present Adams actuator rudder only ship can be converted to elevator by using this decoder and an additional actuator. Kit contains all transistors, diodes, drilled and etched PC base, all required components, instructions. Measures 1 x 1 x 1/2". Designer approved. An exclusive Ace proprietary design.

No. 15K6—ERD Kit \$11.00
No. 33K17—ERD Instruction manual, separately \$1.00
No. 28K30—ERD PC base, drilled and etched 1.00

PROVEN WINNER! ACE VARI-CHARGER

IN KIT FORM OR ASSEMBLED

Will charge nickel cadmium batteries—20 mills to 150 mills. Capable of charging up to 12 volt packs. Indexed dial & simple chart for correct milliamp reading for charging different size battery packs. Completely isolated from AC line supply. An extra deluxe item. New transformer of highest quality. UL approved line cord. On-off switch. 500 milliamp diode. Full instructions.

No. 34K21—Ace Vari-Charger assembled \$8.95
No. 34K22—Ace Vari-Charger Kit \$7.50

MORE THAN JUST A CATALOG—FOR 1968

Accessories, Components, Equipment

NEW! ACE RADIO CONTROL CATALOG 1968

MABUCHI MOTORS DELRIN GEARS

If you do it yourself, this excellent inexpensive motor is now available... Diameter 15/16" length 15/16". Shaft diameter .058. Pinion gear & Delrin gears compliment & match this unit. Wt. less than 1 oz. Milliampere drain in free running state only 30 ma at 1.2v—40 ma at 2.4v—45 ma at 3.6v—50 ma at 4.8v.

No. 14K160 Mabuchi RM31-1430 \$2.95
No. 14K158 Pinion gear to fit motor .35
DELRIN GEARS... Great for your servo construction. Two types—90 pitch—with attached drive gears. Designed to be mated—both 3/4" diameter. The difference is in the smaller gear on the output gear.
No. 23K20-60/12 ratio gear \$.65
No. 23K21-60/15 ratio gear .65

The '68 Ace Catalog is also a handbook. With R/C glossary, how to solder, pulse proportional control for rudder & GG, including decoders. Schematic Symbols. Batteries and charging, resistor color code, transistor chart, electric motor spec. chart and much more! All the Ace R/C products are listed as well as thousands of other R/C items and accessories made by other manufacturers. Catalog is three hole punched to fit Ace Binder. Catalog cost is only \$1.00—refundable on first order!

◀ Ace Vinyl Binder for the Protection of your Catalog and also all R/C instructions, R/C Data information from Ace, newsletters, etc.

Important: For overseas delivery on catalog or Binder please add 50¢ for additional postage.

NEW! ACE RADIO CONTROL • BOX 111 • HIGGINSVILLE, MISSOURI 64037

NAME _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____

QUANTITY	STOCK #	NAME OF ITEM	PRICE	TOTAL

Guaranteed delivery anywhere. Orders over \$3.00 sent prepaid. Orders under \$3.00 please add 50¢ for postage and packing.