

Fougla Cyclone

NICK ZIROLI

This .09-powered scale model of a famous French jet-powered sailplane is ideal for flat-land soaring.

NOT so many years ago, a flyer's greatest thrill was gliding down a hillside hanging from a sophisticated box-kite. Aviation has come a long way in the last 70 years or so. Bone-breaking hillside gliding has given way to propeller-driven and jet-powered aircraft. But to some, the challenge of gliding, or now more correctly soaring, is the ultimate in flying thrills. Flights for hundreds of miles, at thousands of feet, are made with modern sailplanes.

Radio-controlled model sailplanes have gained great popularity. Slope-soaring on the west coast has brought interest to this phase of modeling. As witnessed by the number of gliders flown at the DC/RC Symposium this year, activity is high here on the east coast. Soaring, be it slope, tow-line,

or power-assisted, will become even more popular in the future. Those that like ram-rodding around the sky at 80 to 100 mph should try gliders for a change of pace.

The French "Fougla Cyclone" has always been in my mind as a model to build. Everything about it is as modern today as it was when it was manufactured in 1949. The prototype was all-metal with fabric-covered control surfaces. A true high-performance sailplane, its auxiliary power was a small turbojet engine. The 100-lb. engine had a maximum thrust of 200 lbs. at 34,400 rpm. Being only 16" in diameter and 32" long, it fit easily into a streamline pod behind the canopy. The V-tail placed the tailplanes out of the way of the exhaust.


A search through my files uncovered a

3-view and details of the full-size "Cyclone." The original had a wing span of 43 feet. I wanted a model large enough to give soaring performance with proportional equipment. The plan was laid out at a 2" = 1' scale. This produced a wing span of 7' 2", not too big and unwieldy, yet large enough to perform well. Plug-in wing panels take the problem out of transportation.


A powered glider was a must. I did not want to depend upon a tow-line or hi-start, and suitable slopes do not exist on Long Island. The first thought was to place an engine in the jet-pod and raised high enough for the prop to clear the fuselage. This would upset the clean lines of the Cyclone. So the opposite approach was taken. The engine and pod were kept intact. A clearance slot was then made behind the canopy for the propeller. This no doubt cuts down on efficiency. Since all we are interested in is getting altitude, I feel the improved appearance more than offsets this loss. Maximum propeller diameter is seven inches.

The engine is an old McCoy .09 diesel. Instant starting without the help of a booster battery never ceases to amaze those that are unfamiliar with diesels. This provides ample

From any angle the Cyclone looks like a modern sailplane but actually was being produced in France in 1949. At that time it was considered a high-performance sailplane. Jet engine permitted unassisted takeoffs and sustained cross-country flights.

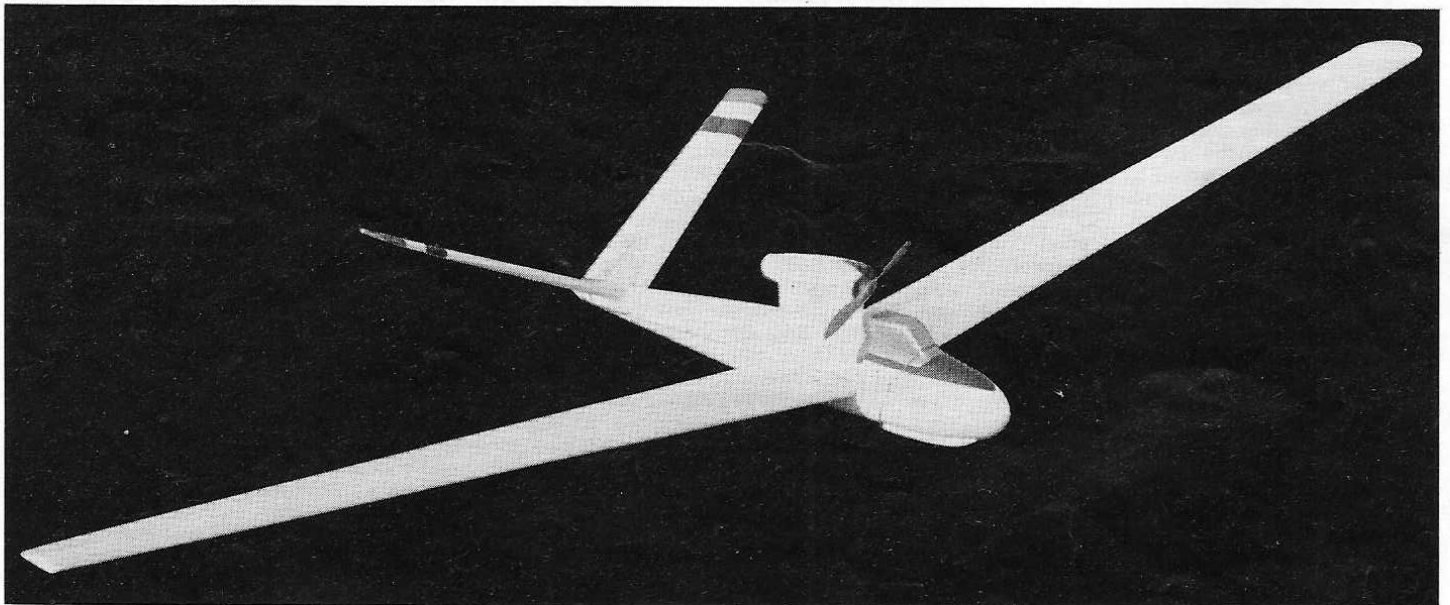

In spite of the engine it is aerodynamically clean. Large control surfaces on V-tail give positive rudder and elevator responses but with relatively flat turns.

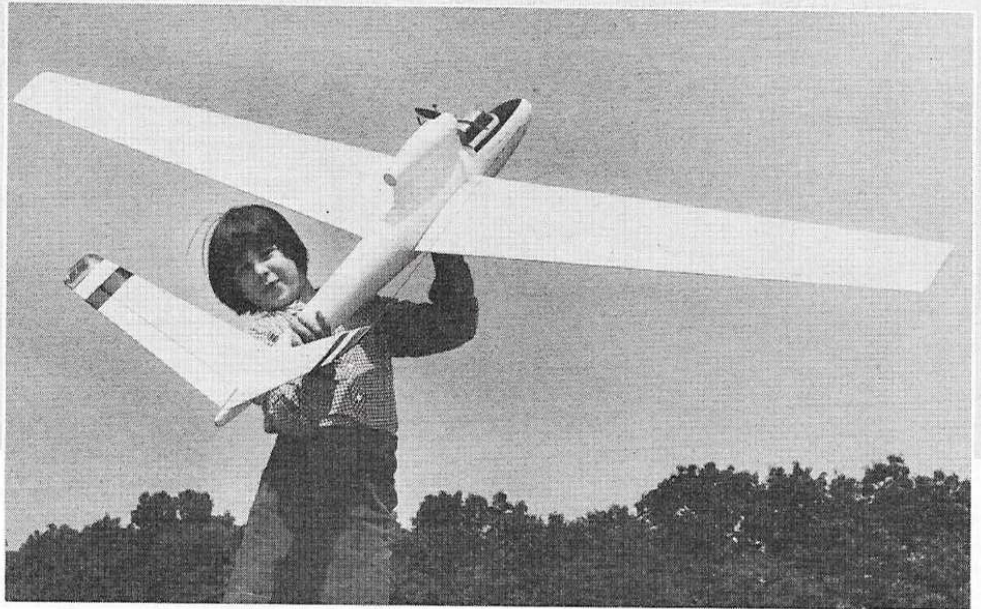

power. Plans show a Cox 09. An engine larger than an .09 seems unnecessary. A two-minute engine run gets the Cyclone up high enough to seek out thermals.

The original intention was to use the throttle servo to operate an engine cut-off and spoilers. A fuel cut-off would be actuated by moving the throttle control from high to about a quarter of the way to low. The rest of the travel would operate the spoilers, full low giving maximum spoiler extension. Unfortunately, construction proceeded too far, too fast to include them. The model shown does not have this feature, but it could be added to your plane.

Radio equipment used is the new Citizenship DP-4 system. The airborne system is, I think, as up to date as any of the new digital systems. A compact receiver and plastic-cased servos with multiple outputs are featured. Servo response is fast.

Since the spoilers were not installed, only two channels were used, one for rudder and one for elevator. There are a number of ways to get the control surface movements necessary with a V-tail that is one up and one down, both up or down, or a combination of both. As can be seen from the pictures, I chose the easiest way out. The rudder servo, hooked up like ailerons only reversed, is mounted on a slide. Elevator action is produced by moving the rudder servo forward or back making each control surface go up or down the same amount. The elevator servo is connected to it to give this movement.

Remember that for rudder control the plane will turn toward the down-going surface. The other one will be up. Co-ordinated rudder-elevator turns are performed just as with conventional surfaces. This system of one servo moving another is adequate for a glider where G forces are low. I would not recommend it on a high-speed multi-ship.

Construction is easier than the seven-foot wing span might lead you to believe. The fuselage, and each wing panel, is 41" long. The model does not become large until it is assembled.

Wing construction follows the method deBolt used on his great "Live Wire" series. This is one of the best ways of building a flat bottomed wing. If the board it is built on is true, the wing will be. It is not removed from the plan until it is completed except for the leading edge.

The first piece to be made is the wing tongue. I used 1/16" hard aluminum. You may

prefer plywood; it is easier to obtain and work with. Plywood is shown on the plan. Cut this to size so it can be fitted to the wing slot during construction.

The wing ribs are made by stacking 13 pieces of 3/32" sheet between 1/8" plywood root and templates. Keep the spar cut-outs perpendicular to the root rib. Drill two holes through the stack and hold together with the 4-40 screws and nuts. Carve and sand to shape. Cut the spar slots with a razor-saw. Separate them and square each one up. Cut out a new tip rib from 3/32" sheet. Use this first set of ribs as patterns and cut out a second set, one rib at a time. Make W-1 and W-3 of 1/8" plywood.

The leading and trailing edges are cut from firm 1/16 x 3 x 48" sheet. If a 48" length is not available, splice 36" together at 45 degrees. Reinforce the splice during construction. Cut four sheets to 41" long. Using a good straight edge, cut them down the center, starting 1" in from the edge on one end, and 2" in on the other end. This should

produce eight pieces 41" long that taper from 2" to 1" wide. These are used for the leading and trailing-edge sheeting.


Cover the plan with Saran Wrap. Pin down the leading and trailing edge. Cut out and cement the root sheeting and 1/16 x 1/4" lower cap strips in place. Assemble the wing-tongue box on the 1/16" root sheeting. Use epoxy. Use the ribs as a guide to cement the 1/8 x 3/16" hard lower spar down. Cut W-1, 2, 3 to clear the tongue box. Cement all the ribs in place, followed by the 3/16"-sq. top spar.

Cut out 1/8" sheet leading-edge cap and cement in place. Sand down to match the ribs. Taper the bottom trailing-edge sheet again to match the ribs. Cement and pin the leading and trailing edge sheets in place. Sheet the wing root top. Cut to length and cement the top cap strips in place. When the assembly has dried, remove from the building board. Sand the front off flat and cement the 1/2 x 3/4" leading edge to it.

Rough-carve the tip blocks to shape and install. When these have dried carve and sand to shape. A razor-plane makes short work of this type of job.

Cut out the stabilizer ribs from 1/16" sheet. Pin the 1/8"-sq. lower spars down with a

Continued on page 61

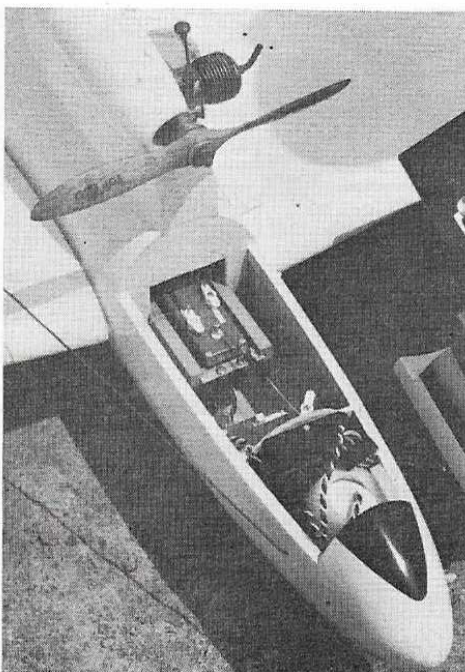


Servo positions show full-right rudder and full-down elevator. Pitch adjustments are easy with an R/C Craft link between servos.



This shows left-rudder command — don't get your controls reversed. Both surfaces move up or down together for pitch control.

1000 SIZES OF FUEL TANKS!

FLEXISCOPE



TWO TELESCOPING HALVES THAT S-T-R-E-T-C-H TO FIT EVERY REQUIREMENT!

Three basic sizes fit every tank need up to 4 oz. Three hundred other great accessories at Hobby Shops, or send dime for literature.

Dynamic MODELS

13309 SATICOY STREET
NO. HOLLYWOOD, CALIFORNIA 91605

RELIABILITY

.....NOW IN TWO GREAT NEW SERIES.....

LOGITROL and PRO-SERIES



World famous LOGITROL... Pick of the Scale Champions... in a brand new series! New thin model transmitter with Exclusive, Adjustable "Feel" sticks.

All standard 27mc, 52mc, 72mc frequencies, at same low price. System includes transmitter, receiver, power pack, 4 servos, accessories.

Brand New from the Reliability Leaders... the PRO SERIES... Finest 3-wire system built to date. Highest noise immunity, best servo resolution available. All components are specifically selected to insure a precision system.

All standard 27mc, 52mc, 72mc frequencies, at same low price. System includes transmitter, receiver, power pack, 4 servos, accessories.

New 4-wire system is the finest available today. LOGITROL's variable frame rates allow over 200 servo position increments. Excellent noise immunity permits even metal to metal linkages.

TWO STICK MODELS
(Specify left or right throttle) 5 channel \$395
7 channel \$445

SINGLE STICK MODELS
(Left handed, add \$20) 5 channel \$420
7 channel \$470

New enclosed, adjustable "feel" sticks for the most perfecting flyer. Entire system is burn-in for over an hour and backed by a full six months warranty.

TWO STICK MODELS 5 channel \$470
(Specify left or right throttle) 7 channel \$520

SINGLE STICK MODELS 5 channel \$495
(Left handed, add \$20) 7 channel \$545

UNI-MOUNT (shown, holds receiver and 4 servos) \$4.95
AIL-RON MOUNT (shown, shock mounts 1 servo) \$1.25

FACTORY AUTHORIZED SALES AND SERVICE CENTERS

BRAND NEW...to serve you and our dealers better FACTORY TRAINED SERVICE PERSONNEL

Los Angeles Area
EK WEST (213) 326-7733
23625 Pineloret Lane
Harbor City, Calif. 90710

San Francisco Area
NELSON MODE. PRODUCTS, INC.
6053 Dougherty Road (415) 828-6350
Dublin, Calif. 94566

Chicago Area
RADIO CONTROL CENTRAL
Box 449, Elmhurst, Ill. 60126
Service (312) 541-1192
Sales (312) 832-4908

Kansas City Area
KEN'S R/C (913) 631-3158
10915 W. 59th Terrace
Shawnee, Kansas 66203

Northeast Area
NEW ENGLAND R/C, INC. (617) 343-4827
340 Broad St. P. O. Box 437
Fitchburg, Mass. 01420

Southeast Area
COMING SOON...To be ANNOUNCED!



PRODUCTS INC.

3233 W. EULESS BLVD HURST, TEXAS 76053 (817) 283-4092

Fouga Cyclone

Continued from page 19

1/16" shim under them. Cement S-2 and S-7 in place. Line up even with the plan. Cement the 1/4"-sq. trailing edge to the ribs. Block up to keep it straight from root to tip. Add the remaining ribs, omitting S-1. Cement the leading edge and top spar in place. Use the angle template to install S-1 in the correct position. Make one right-hand and one left-hand panel. Cement the two panels together at S-1. The angle of the Vee should be 120 degrees. Sheet the bottom and the center section with 1/16" sheet. Add the tip blocks and sand to shape. The wings and

Also available; speed fueler, catalogue #BK128, fool-proof, failsafe and trouble free. No batteries. Only \$6.95.

B.K. has a Better way

NOW! A steerable nose gear that can take it!


Designed to meet the needs of the most demanding flyer.

Solid Plastic Bearing Block →
Positive Locking Tiller Bar →
(outlasts others)

3 wires encased in a seamless steel tube assures longer wear and the utmost strength

\$6.95

Nickel Plated
BK - No. 150
Steerable Nose Gear

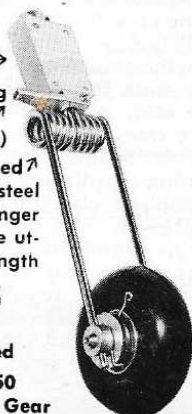

- Heat Treated Dual Coil Springs.
- 3/4 Spring Wire withstands severe landing shocks.
- Positive Locking Hub eliminates nose wheel wandering.
- Adjustable wheel size.
- Accommodates W.A.G. Electric Brake and Hub and the new Du-Bro Friction Brake.
- No side sway.
- Adjustable height.



MODEL PRODUCTS

4765 E. ILIFF DENVER, COLO.


No matter

how you look at 'em...




SCHWEIZER 2-32

A truly magnificent 42 $\frac{3}{4}$ " reproduction of the Schweizer 2-32 sailplane. With the tremendous popularity of sailplane flying today, the Schweizer is a must for every modeler. Faithfully reproduced, the flight performance of this giant 42 $\frac{3}{4}$ " beauty is truly amazing. It performs like a real competition tow-line glider. **\$2.98**

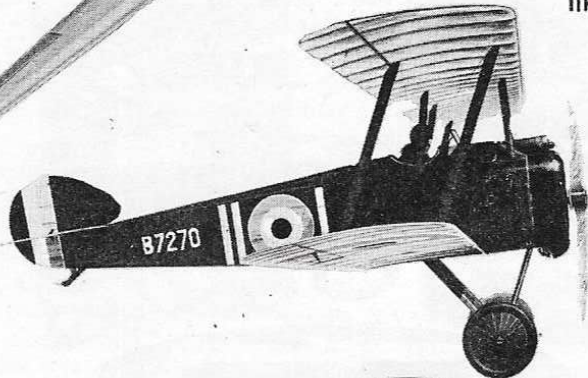

SOPWITH CAMEL

This is the "super-famous" fighter which constantly flies over the front lines looking for the "Red Baron." Our kit is an authentic reproduction of this classic World War I bi-plane; and an excellent flyer. **\$3.98**

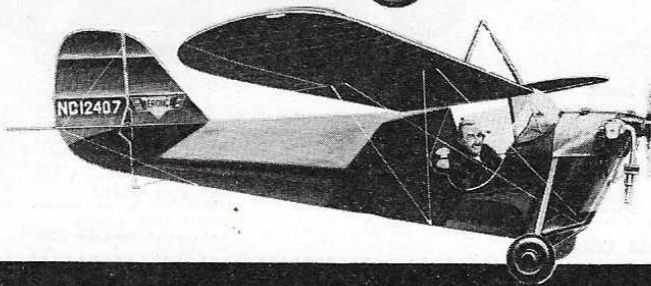

AERONCA C-3

This marvelous airplane trained many thousands of pilots in the early 30's. It is especially dear to the hearts of all scale model builders because it is so well suited to great model flying with its large wing and tail, and low center gravity. **\$3.98**

THE BEST MODEL PAINTING IS DONE WITH AN AIR-BRUSH

More natural, more authentic painting and finishing. Mix your own colors. Fogging, blending, custom finishing without brush marks.

ECONOMY MODEL ONLY \$5.98 RETAIL

BADGER PAINT-SPRAY AIR-BRUSH

PROFESSIONAL TYPE

BADGER hobby & touch-up AIR-BRUSH

AT FINE HOBBY STORES



FREE BROCHURE

or write to: Dept. I

BADGER AIR-BRUSH CO.

9201 GAGE AVENUE • FRANKLIN PARK, ILLINOIS 60131

stabilizer may be final sanded and covered at this point, if desired.

The fuselage sides are made from 1/4 x 2 x 36" medium sheet. Cut the two sides from a 4"-wide sheet if necessary. Cement the 1/8 x 3/8" hatch doublers where shown, on the plan. Epoxy the wing-tongue braces in place. Use epoxy on all the wing-tongue joints.

Mark former locations on the inside of each fuselage side. Join the sides with formers, F-3, 4 and 5. With these in place, the sides should be parallel and square to each other. When dry, pull together at the nose and tail and install the remaining formers.

Cut the skid from 1/4" plywood. Bend the 1/8"-diameter wire wheel mount to shape and secure to the skid with metal straps. Retain the wheel permanently in place. Cover the tape. Epoxy the skid and wing tongues in place.

Cement the 1/4" plywood motor-mount plate and lower block in place. The block should overhang F-4 at least 1/16" on either side. Cement the three N-1's in place. Recess the top one to lay along the motor mount. Install N-2 and N-3. Cut out the center of N-2 to accept a wedge tank on edge. Epoxy in place after modifying the filler, vent and feed to suit.

Plank the nacelle and bottom of the fuselage with 1/8 x 3/8" strips. Drill the motor mount for the engine to be used and install with blind-nuts. Remove the engine and cement side block next to the motor mounts.

Trim the sides at the tail so the stabilizer is a good fit. Maintain a zero-degree incidence setting in relation to the centerline. Cement in place, checking all angles to assure it will be on correctly.

Before the top of the fuselage is planked install the servos and pushrods. Get the linkages working as required and then remove the servos. Plank the top with 1/8 x 3/8" strips. Do not cement them to the sides along the edge of the removable hatch. Cover the nacelle pylon with 1/16" sheet with the grain vertical.

Cement the nose and tail blocks in place. When dry, carve and sand the fuselage to shape. Cut the hatch free and remove. Cement the prop-arc block between the planking and to F-3A. Temporarily install the engine and prop. Check that there is clearance through the cut-out for the prop.

Final-sand the fuselage, and finish with whatever material and procedure you prefer. I used a coat of clear dope followed by a couple of coats of dope-talc sealer, sanding between each coat. The fuselage was then covered with light Silkspan and four coats of dope applied again, sanding between each coat. Color dope was sprayed on. Two coats are adequate.

The wing and stabilizer were covered with Coverite, with three brushed coats of clear and two coats of color sprayed on. My model was painted all white with a red and blue stripe on the stabilizer tips. The canopy is metallic blue, and anti-glare panel dark blue. The engine nacelle and pylon should be silver, but I left them white.

When the finishing is complete install the engine and radio equipment. Add weight to the nose if necessary to place the center of gravity as indicated on the plan. Mine did not need weight.

If there are no warps and the C.G. and decalage are correct, test flights should be straightforward. My first flight was made with an engine run about 30 seconds, just in case it was badly out of trim. It is easier to fight the stick for 30 seconds than for two minutes. This first flight proved that the anticipated trim was close enough to try a full tank. The second flight was terminated over a half hour later because I thought my neck was going to break if I had to look up for another minute. After a rest a second flight was made for about 20 minutes.

These two flights alone convinced me I had been missing a lot of fun that gliding has to offer. When I bring the Cyclone to the field now, a chaise longue goes with me.