




And here we have the Champ himself with the bird that is doing it all so very well. This particular shot was taken at 72/73 Tangerine contest.

# MACH 1



BY NORM PAGE

Model Airplane News continues its Parade of Champions with this latest entrant in the contest arena—imagine a plane that can win the Masters, Tangerine and Southwestern Champs in the short period of five months!

• I don't know how much "masterminding" really went into the design of the Mach 1, but I like to think that maybe a little bit did, anyway, especially in view of its contest performance record over the last couple of years. Since its introduction in the spring of 1971, it has placed first in nearly every sanctioned contest entered. Of the 12 contests entered during 1971, there were ten firsts, one second and one fourth. Since the end of 1971, the record is a little better. All contests entered were won except one, the Nats, where it placed fourth as it did the year before. Of course, the best win to date was the 1972 Masters in Huntsville, where the U.S. FAI Team was selected. This win, I suppose, required what one might call a little bit of masterminding.

At first glance, the Mach 1 might look like a conventional design. However, closer examination will reveal several departures from the usual Pattern shop used today. The fuselage is 57" long and the wing area is 715 sq. in.



Everyone wants to be identified with a winner! Don't know who the spectators are in this one.

## MACH 1

and that, I think you'll agree, is a large airplane in anybody's book! As a comparison, the average Pattern ship used at the Huntsville Masters contest had a fuselage length of 50 in. and a wing area of 674 sq. in..


Another departure from the usual is the relatively high taper ratio of the wing, nearly 2:1. Again, the average Pattern ship used today rarely exceeds 1.5:1. In addition, the Mach 1 has a wing which has a nearly straight leading edge. The only other Pattern ship around which sports a somewhat straight leading edge is Phil Kraft's Quick Fly. Also the low aspect ratio of the Mach 1 is fairly unusual. For an area of 715 sq. in., 62 in. is not very much span.

In designing an airplane such as the Mach 1, consideration was given to certain performance characteristics in order for the finished design to be as competitive as possible. Some of these performance characteristics were general and some were specific in that they pertained to the airplane's behavior in a particular maneuver. The general performance characteristics are somewhat more obvious than the specific performance characteristics and will be discussed first.


Probably the most important general characteristic is smoothness of flight. If you are using a design which exhibits smoothness of flight, then you can go on and achieve gracefulness in your pattern. Smoothness and gracefulness together are two things that the judges are looking for in every one of the maneuvers. Next to smoothness of flight, predictability is probably the second most desirable characteristic. The ability of an airplane to behave the same flight after flight is a valuable and indispensable asset. Predictability adds greatly to the potential of achieving precision and consistency in the performance of your maneuvers. Smoothness and predictability, to a certain extent, tend to go hand in hand. You achieve one and you tend to get the other.

Another general characteristic important to have is for the design not to be too critical, "critical" in the sense that its performance will be sensitive to a mediocre engine run, for instance, or to the setting of the trims should they be off just a little, or to your timing should it be off a bit, for some reason or other, or to the C.G. placement such that the weight of the fuel burned off during the flight seriously affects its flight characteristics, etc. *Smoothness of flight and predictability without being critical, which leads to gracefulness and precision in the performance of your pattern, are essential to a good competitive airplane design.*

So much for the general performance characteristics. Let's now take a look at some of the specific performance characteristics. They're less obvious and a bit more interesting to discuss. For a couple of reasons, the ability to perform good rolls was one of the primary performance considerations in the

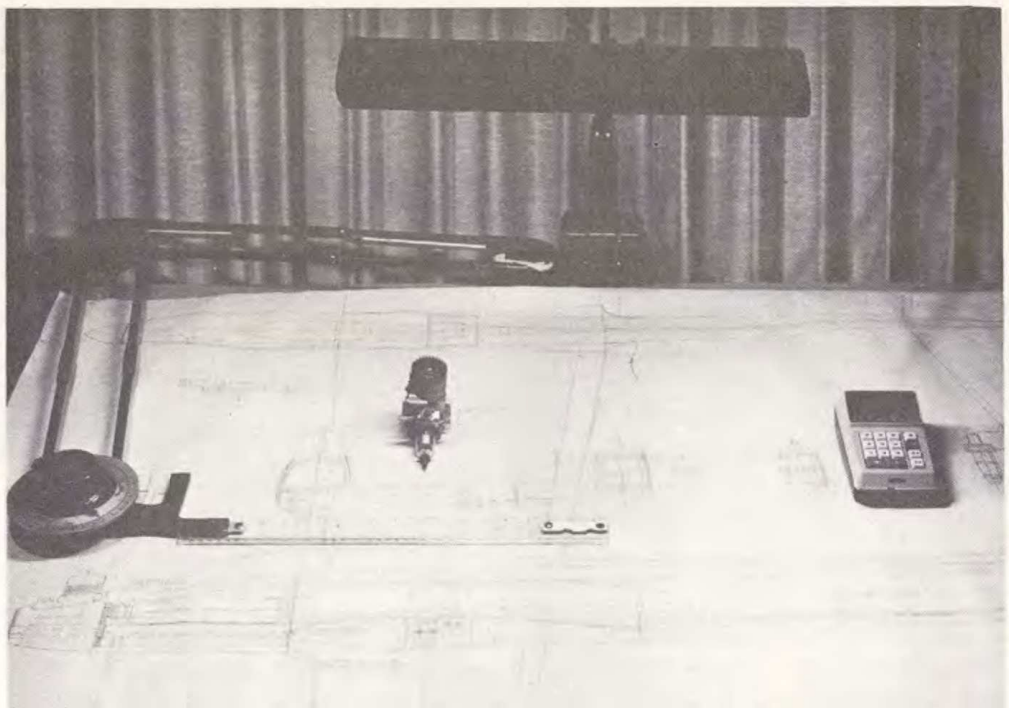


Nothing like a computer to help get you the answers. Care is important when working out details.

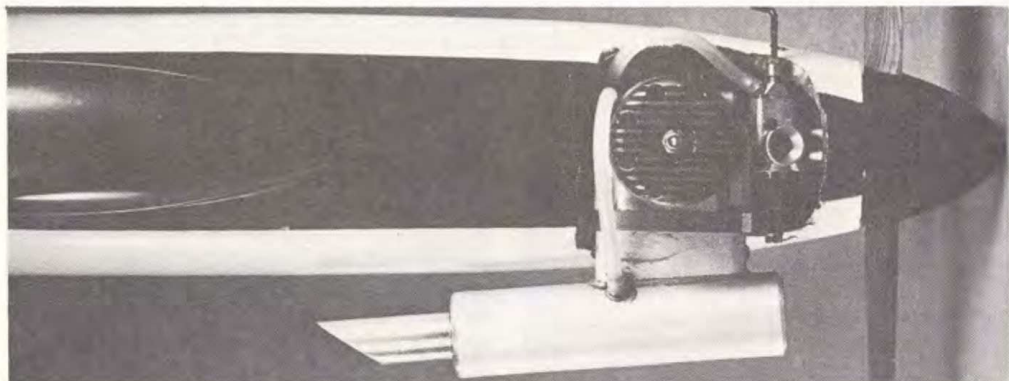


No frills here, just the bare opening with clearance for tuning—note manifold pressure.



Pro Line retracts, again no frills, just the bare essentials necessary for installation.

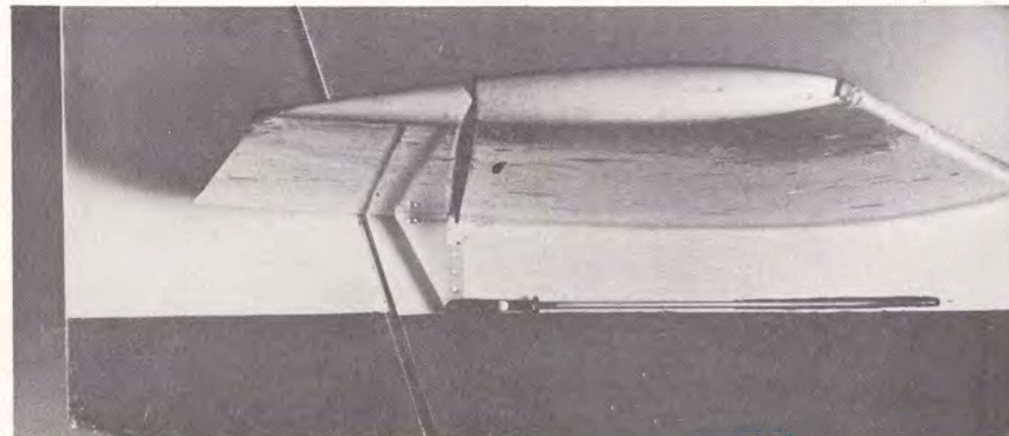

V'ed leading edge, as discussed in article,

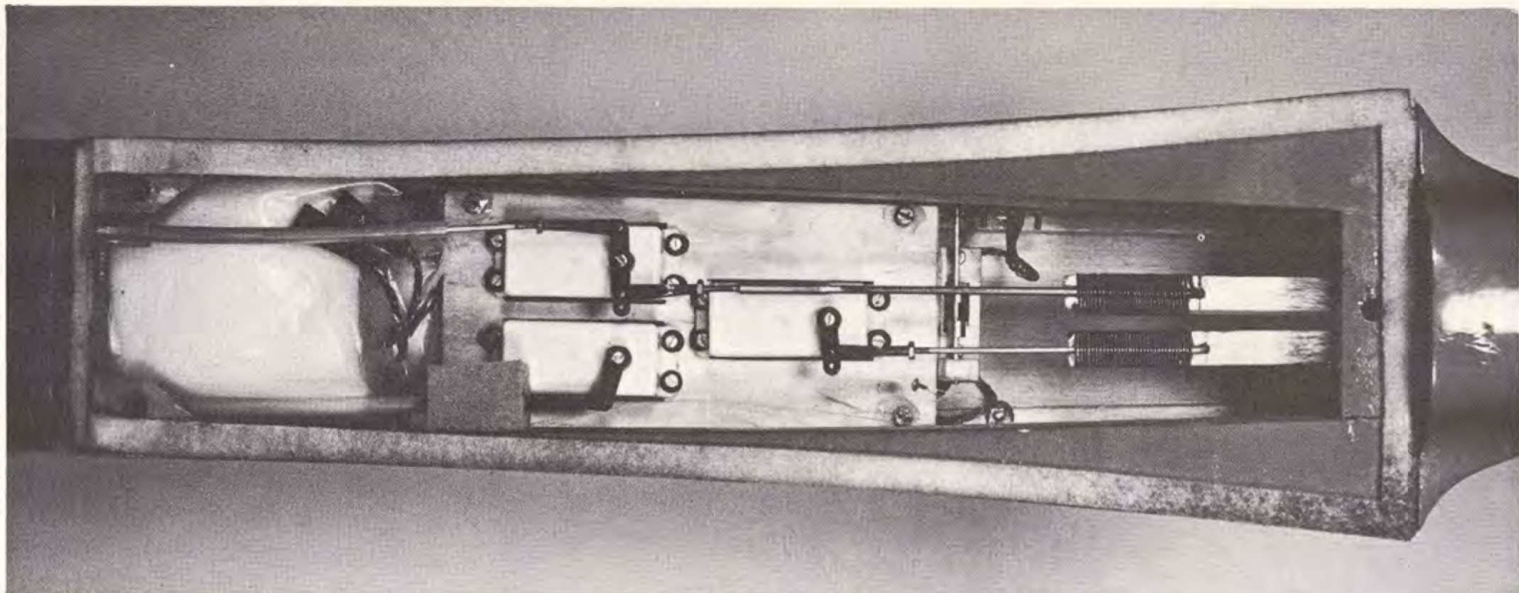

A look inside the fuselage discloses plenty of room to accommodate all the required essentials—note jam nut used to lock Quik-links.


## MACH 1

design of the Mach 1. If you look at the distribution of the K factor points for the various FAI Pattern maneuvers, you'll notice that of the six most difficult maneuvers with the higher K factor (15 points), half of them are rolling, one looping and the other two are combinations of the two. I think it's pretty apparent that there is quite a bit of emphasis on the rolling maneuvers. At least, they are apparently considered to be somewhat more difficult than the rest. In addition, I've noticed that over the years there has been and still is, to a certain extent, a real lack of skill in the general performance of the slow and four point roll. I feel this is primarily a result of Pattern ship designs which generally handicap the flyer in the execution of these maneuvers. The problem centers around the interaction of top rudder with the roll rate or, in the case of the four point roll, where it

interferes with holding the vertical points. Because of this interaction of controls, you see a lot of flyers doing slow and four point rolls using little or no top rudder and compensating with extra up and down elevator when the wings are more or less level. This, of course, causes the airplane to deviate from a level straight path, which, according to the rule book, is a basis for downgrading. Moreover, in an effort to minimize these deviations, the maneuver is often performed quite rapidly, making it look quick and somewhat lacking in gracefulness. This interaction of the rudder with the roll is a flight characteristic which I feel is intolerable if you are not to be handicapped by the design you are using in competition.

Another area of concern in the design of the Mach 1 was the stall characteristic, particularly as it pertains to spin entries. Here again, I've noticed over the

years that there has generally been a real lack of skill in the execution of spin entries. It seems as though the only thing anyone is interested in these days is the spin exit heading. As a result, you see a lot of extremely sloppy spin entries. The problem centers around the ability of the airplane to stall without dropping a wing. A lot of designs which have a tendency to top stall won't do this consistently. And if you haven't noticed, this is a requirement in the performance of the spin maneuver. The rule book, under the description for that maneuver, says the airplane "pulls up into a stall and commences the spin." It doesn't say the airplane "snap-rolls out of a nose high attitude into a spin," which is the way you see it done by a lot of flyers. As a matter of fact, at the judges' checkout and briefing at the World Championships in Doylestown

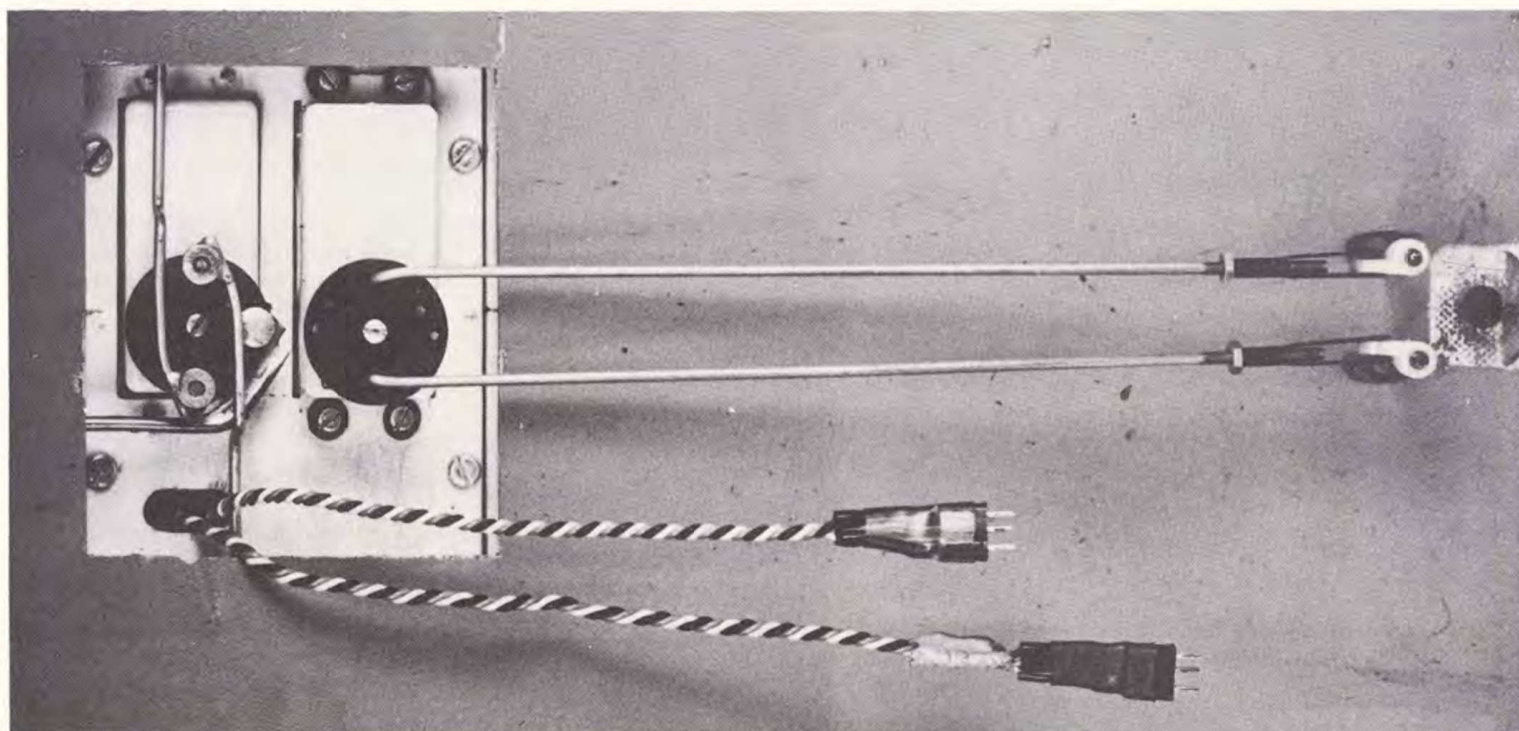

Close-up of aileron and retract servos—Z bend used for aileron pushrods,

# The Cobra Strikes Twice!

## RC 'copter flying at it's finest

Choose the Bell Huey 'Cobra' that meets *your* specifications. Whether you select the 72" Schluter-designed HEGI, or the smaller 53" KALT which includes engine, you get the ultimate in 4 Channel RC helicopter flying. Both kits are precision engineered to exacting tolerances and include all custom crafted parts, pre-finished (unpainted) fiber-glass fuselage and everything you'll need to build and enjoy this new and exciting flying experience that's perfect for 'back-yard' small-space performance. You get all the thrills, the action, of the "real thing" with either kit. Performance proven with thousands of flights.



### Kalt

Fuselage: Approx. 53"  
Main Rotor Dia.: Approx. 50"  
Flying Weight: Approx. 7½ lbs.  
Engine Power: .45  
Includes engine and fully assembled gear box **\$399<sup>95</sup> Kit**  
(shipping charges extra)



### Hegi

Fuselage: Approx. 72"  
Main Rotor Dia.: Approx. 60"  
Flying Weight: Approx.. 11 lbs.  
Engine Power: .60 or .61 (not included)  
**\$389<sup>95</sup> Kit**  
(shipping charges extra)



DEPT. MA 314 Fifth Avenue • New York, N.Y. 10001 • Wholesaler-Retailer Inquiries Invited

## The X-acto that leads 5 lives.



Each of these blades (from our X-acto set #531) leads a different life. But the heavy-duty handle accommodates them all. The saw blades give hobbyists precise hairline cuts through a variety of materials. And the knife blades cut plastics, shape balsa, carve plywood, work fiberglass, cut templates, whittle. With carrying case \$3.50. X-acto, 48-41 Van Dam St., L.I.C., N.Y. 11101,

## Mach 1

(1971), about half of the judges were giving zeros for the spin maneuver if they did not see the airplace drop its nose with its wings level during the stall before entering the spin.

Looping maneuvers, of course, are important, too, and consideration was also given to their performance in the design of the Mach 1. Generally, loops require the elevator response to be smooth in pitch and that the action of the rudder and ailerons be fairly gentle, particularly around neutral. Here again, as with the slow roll and the four point roll, there should be no tendency for the use of rudder to cause the airplane to roll. The reason for this is that more often than not you'll be required to perform your maneuvers crossing and, as a result, the tendency to drift will have to be compensated for primarily by the gentle use of rudder. And if the use of rudder in the loop causes roll, then you've again got an intolerable problem.

So, with these general and specific performance characteristics in mind, the Mach 1 design evolved. Its evolution took a lot of thought and time in order to be sure its configuration would be able to achieve the desired flight characteristics. At this point it might be interesting to discuss the various aspects of the Mach 1 design in order to understand both how it evolved and at the same time how it works.

Strangely enough, one of the first considerations in the detailed design of the Mach 1 was *its size*. The decision to make it relatively larger was made basically for two reasons. First, over the years, I've noticed that the larger Pattern aircraft seem to have extremely good visibility from a judging viewpoint. As a result, the placement of the maneuvers distance-wise doesn't seem to be nearly as critical as it is for the smaller aircraft. You get

the smaller aircraft just a little too far away and you give the impression you are trying to hide the maneuver. It becomes difficult to tell exactly what the airplane is doing, whether its wings are level, or if it is tracking on a straight line, and so on. A little closer in and you're likely to exceed the 45 degree height limitation. Secondly, the larger Pattern aircraft has the additional advantage of improved aerodynamics...the larger they are, the better they fly. What's the smoothest flying airplace of them all? It's the Boeing 747, of course, the largest of them all. I think Vic Husak recognized this principle and employed it in his large Pattern designs like "Mr. Slick." It's a little like a ship on an ocean of waves - the larger the ship relative to the size of the waves, the smoother it rides.

One problem with the larger Pattern aircraft is that they develop more drag and as a result, tend to be slower. So consideration had to be given to the speed. I wanted a large airplane which would still cruise fairly fast and perform relatively large maneuvers. Since the wing on the average Pattern ship has about five times the frontal profile area of the fuselage, it is the main producer of drag, especially when you take into account the additional effects of parasitic and induced drag. Thus it was decided to keep the wing fairly thin in an effort to keep the drag down and the speed up. However, one of the problems you encounter when you use thin airfoils is that they are too efficient, resulting in too flat a glide to make reasonable approaches. A flat glide increases the difficulty of hitting the spot during the landing perfection maneuver. Hence a low aspect ratio was chosen. The low aspect ratio wing is quite efficient at high speed, but relatively inefficient at low speed. In other words, at low speed the low aspect ratio wing tends to develop more drag than a high aspect ratio wing. This is probably

# EASTERN RADIO CONTROL AEROBATIC CHAMPIONSHIPS

JUNE 16-17, 1973

Richardson Field, Ridgefield, Connecticut

**SANCTIONED AAA PLUS 2 DAY MANUFACTURERS SHOW EVENTS**

**A Pattern (Jr., Sr., Op)**  
**B Pattern (Jr., Sr., Op)**

**C Novice (Jr.-Sr., Op)**  
**C Expert (Jr.-Sr., Op)**

**AMA Scale**  
**SPORT Scale**

Sponsored By: The Ridgefield Rotary Club

Hosted By: The Fairfield League of Yankee Radio Controllers

Contest Director: Bob Noll (203) 792-4190 • Event Chairman: Bill Allen (203) 438-8700

## ENTRY AND PRE-REGISTRATION FORM

NAME \_\_\_\_\_ AMA # \_\_\_\_\_  
ADDRESS \_\_\_\_\_ BIRTH DATE \_\_\_\_\_  
CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

Events (Please Check)  A Pattern  B Pattern  C Novice  C Expert  AMA Scale  Sport Scale

ENTRY FEE: \$5.00 per event

A complete entry package including maps, camping and motel information will be sent to all contestants upon receipt of this form.

Make Checks Payable & Mail To:

THE RIDGEFIELD ROTARY CLUB  
P.O. Box 41  
Ridgefield, Conn. 06877

**SALES UP — PRICES DOWN**  
**Now \$79.50**  
**Hi-Lo Super Deluxe Kit**



Kit includes beautiful fiberglass fuselage, engine mounts, firewall, bulkheads all installed. Glaskin wing and stab, all balsa pre-cut to shape; instructions. Retractable cutouts fit most units. Orders must specify engine upright (recommended) or side-mounted, fixed or retract gear.

ATTENTION Class A & B Pattern flyers: here's a great opportunity — win 1st place flying your Hi-Lo in any AMA-sanctioned contest during 1973 and we will send you \$20.00 or a \$20.00 credit on any of our kits. Offer limited to one win per person. Send small photo of yourself with Hi-Lo and note from CD verifying your win.

Dealer inquiries invited

**Airborne Associates**

4106 Breezewood Lane, Annandale, Va. 22003

because the tip losses with a short wing tend to involve more of the wing area at low speed. Anyway, in the case of the Mach 1, once it is slowed up for an approach, it has a nice angle of descent. This means, of course, that you must first bleed off the excess speed before you try to plan your approach. Once you do, it approaches and lands normally.


Fast, thin winged airplanes don't always have the good stall characteristics so important to really nice spin entries and landings. In an effort to assure reliable wing level stalls, the leading edge of the wing was kept nearly straight. This tends to reduce the possibility of tip stalling and increases the tendency for the wing to stall at the root first, which is what we want. Sweeping back the leading edge has the opposite effect and tends to induce top stalling. This in turn tends to cause one wing or the other to drop first during a stall. To counteract this tendency, a thicker percent tip airfoil is employed on many of the

swept wing designs in use today. The thicker tip lowers the stall speed of the tip, or more properly, increases the angle of attack at which the tip will stall. It's a little like having wash-out, except it also works upside down. In addition to no tip stalling during a normal stall, I wanted the Mach 1 to be able to tip stall easily with the use of rudder to assure that once it had been stalled, it would go a spin. For this reason, a high taper ratio was chosen to be used with a nearly straight leading edge.

As a result of this combination, you get a reliable stall and spin entry along with an added bonus. Recovery from the spin is almost instantaneous. As soon as the rudder is released the spin is broken and recovery can be accomplished in one eighth of a turn without reversing the controls. This, of course, makes hitting the entry heading with the exit heading a lot more reliable. One thing I didn't anticipate about the way the Mach 1 spins, is its gentleness. This, along with its stall and spin recovers characteristics, makes the spin an outstanding maneuver for the Mach 1.

For the same reason the Mach 1 was made large for visibility, the wing was placed on the bottom of the fuselage. In this location, the wing's visibility is much greater for both contestant and judge. It affords the judge a lot better opportunity to see the wing at all times, making it easier for him to determine whether they were level in loops, or on takeoff, or in a horizontal eight, and so on. It's a little like the placement of the maneuvers. You are supposed to place them so that the judge can best determine their quality. Not too close, not too far out, not too high and so on. In the case of the airplane as it presents itself in the sky, the attitude of the wing during the maneuver is one of the things the judge uses as a reference in determining the value of the maneuver. Like the placement of the maneuvers, I think the wing

## VINTAGE R-C PLANS



**9 FT PB-Y-5A**  
**CONSOLIDATED "CATALINA"**  
DESIGNED BY — R.C. SWEITZER

PLANS: 4 SHEETS 36"X70"

**FOR THE MODELER WHO LIKES THEM—**  
ALL RIBS & FULL FORMERS  
SHOWN ON PLANS. **-BIG!**

(OVER 50 OTHER PLANS)

**TRY ONE TODAY... Plans \$12.00**

NEW CATALOG 25¢ - DEALERS WELCOME -

**SID MORGAN**

13157 Ormond, Belleville, Mich. 48111 USA

## AUTO-START-70



Auto-start - 70 introduces to the aircraft modeler, a high torque, reversible, small (only 2½" dia.), lightweight, 12 volt electric starter which will start any engine, .049 to .80 with ease. A must for all r/c pylon racing, as well as finger saver for the sport flyer. Especially good in extreme cold or hot weather, where starting is a problem. Auto-start comes in two models. M-1 is complete with cord, clips, switch installed. New improved drive unit, 2 sizes inserts for spinners or without. M-2 is the same as M-1, but comes with small hi-amp., rechargeable 12 volt battery.

Ohio residents add 4% sales tax

**M-1 \$24.95**      **M-2 \$39.95**

**PENFORD PLASTICS CORP.**

320 CURTIS ST., DELAWARE, OHIO 43015 • PH. 369-1901

should be placed where it is the most visible and this a good reference for the judge. Some flyers take the opposite viewpoint. They hide it in the middle of the fuselage so that the judges can't see the attitude of the wing a good part of the time. This to me is like hiding the maneuvers by poor placement. Along the same lines, the nearly straight leading edge of the wing of the Mach 1 affords an additional degree of visibility and reference for the judges. The same, of course, would also be true if a straight trailing edge were used.

In addition to visibility, the placement of the wing on the bottom of the fuselage has some aerodynamic advantages. It develops less drag there than it would if it were placed either in the middle or on top of the fuselage. The reason for this has to do with the drag resulting from the flow of air around the fillets at the intersection of the wing and fuselage. In level flight there is greater pressure on the bottom of the wing than on top (otherwise it wouldn't be flying). It's probably more proper to say that there is less pressure on top of the wing than on the bottom. In any case, the low wing configuration offers the least amount of interference for the air flowing around the root of the wing where the pressure is the greatest (no fillets or fuselage below the wing). A shoulder wing airplane would have the most drag of all (since there are interfering fillets above and below the wing). The only advantage in raising the wing I can see would be to bring it nearer the thrust line. However, the same

thing can be accomplished by lowering the thrust line which is actually what was done with the Mach 1.

As mentioned before, an area of primary concern in the design of the Mach 1 was its performance in rolling maneuvers. The key to the performance of good slow and four point rolls is to use the rudder so as not to have any effect in the roll axis. Both rudder and dihedral tend to result in rolling forces. The rudder's tendency to roll the airplane is determined by the position of the center of pressure of the rudder and vertical stab combination relative to the roll axis. In general, if the center of pressure of the rudder and vertical stab combination is above the roll axis of the airplane (which is the usual situation), then the use of rudder will tend to cause roll in the opposite direction to which it is applied. In other words, right rudder would tend to cause left roll and left rudder would tend to cause right roll. The rolling tendency can be increased by raising the position of the center of pressure of the rudder and vertical stab combination, or reduced by lowering it.

The tendency for dihedral to cause roll is dependent on a couple of things. How far the wings are from level and whether there is any yaw present (which could be caused by rudder). While dihedral alone will tend to roll an airplane level from a bank, it is the effect of dihedral in the presence of yaw caused by rudder that is of the most interest. A low wing airplane with positive dihedral in level flight will tend to roll right if caused to yaw right, and to roll left if caused to yaw left. As you can see, in the usual Pattern airplane, the

tendencies of rudder and dihedral to cause roll are opposite in effect. If the design is proper, they should balance each other in nearly all attitudes, but only when rudder is being used. The balance is particularly important when the wings are in either a level or vertical position. An airplane in level flight should remain wings level when rudder is applied. For example, if right rudder is applied to an airplane in level flight, its tendency to cause left roll should be counteracted exactly by the dihedral's tendency to cause right roll in the presence of right yaw. The same sort of balance should also be present in a knife edge position. The tendency of left rudder, in a left wing high knife edge position, to cause right roll should be counteracted exactly by the dihedral's tendency to cause left roll in the presence of left yaw. As you can see, under these circumstances, there is a convenient balance that occurs when the amount of dihedral is proper for the location of the center of pressure of the rudder and vertical stab combination above the roll axis. In the case of the Mach 1, enough dihedral was used so that the airplane would groove, hands off, right side up. But not so much that it wouldn't also groove upside down. The rudder area was then placed to produce the balance in relative rolling effects.

The rest of the Mach 1 configuration is fairly straight forward. The thrust line was kept low so that it would be nearly in line with the wing. Actually it passes through the wing. This situation aside from being good aerodynamically, is convenient for the use of a flat fuel tank with the upright engine

## "POLYTHERM" *The NOW tool!* \$36.00

A SUPERB HEAT GUN DESIGNED FOR PERFECT HEAT SHRINKING

A unique design featuring a focused heat beam plus infrared heat creates an amazing tool which provides perfect heat shrinking of all popular shrink coverings. Monokote, Coverite, Solarfilm, Silc-Tac--all "as easy as pie". This is, indeed, the NOW tool! Make it a point to see this gem at your favorite hobby dealer or order directly from us. Truly---YOU'LL WONDER HOW YOU EVER GOT ALONG WITHOUT IT!

POLYTEX UNIVERSAL, INC. BOX 12, NEWFOUNDLAND, N.J. 07435



# strato210

**\$34.95**

(Dealer & Distributor Inquiries Invited)


An advance trainer for the newcomer - a super-stunter for the pro!



FEATURING **tru-lock** CONSTRUCTION

IN FUSELAGE - All formers lock into backbone assuring true alignment for aerodynamic stability.

IN WING PANELS - Leading edge locks into wing ribs assuring warp-free wing construction.

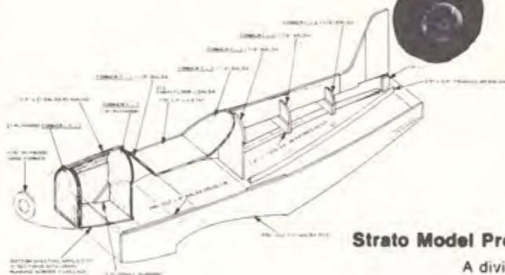

Strato Model Products—Rt. 6, Blakely, Pa. 18447 (717) 383-0551

A division of Warehouse Systems Inc. A full service distributor.

- Designed for trike or tail-dragger
- Sidewinder, upright or inverted engine mount
- 59" wingspan (572 sq. in.)
- .35 c.i. to .50 c.i. engine
- full-size plans included

## KLOTZ Chemical Racing Oil...

blends with alcohol and nitro to ensure that your engine will run faster, cooler, cleaner, and longer.

Do away with gummy, paint-destroying deposits on your fuselage. If you're serious enough to blend your own fuel... go with KLOTZ!... It's the only way to fly.

See your dealer or write us for further details. If you include 50¢, we'll also send a sew-on patch and decal.

Dealer inquiries are welcome.

Klotz Special  
Formula Products  
Box 1343,  
Dept. MA63  
Ft. Wayne, Indiana  
46801



**KLOTZ-POWER TO GO**

mounting. The low wing placement in addition to other advantages previously mentioned, is also convenient for the mounting of one servo in the wing to operate all the retract units. Moreover, because of the wing's nearly straight leading edge, not much of it extends forward of the C.G. and as a result there is plenty of room up front to install the tank and mount the nose gear retract unit without the necessity of having to notch the wing's leading edge for the wheel well.

One consequence for having lots of room forward of the wing is that people often think the Mach 1 has a long nose moment and a relatively short tail moment. However, this isn't really a true observation. The tail moment is about twice the nose moment as is the situation with most other Pattern designs. I think the problem arises from the variety of ways in which people measure moments. Common practice is to use the leading and trailing edges of the wing and stab, and the

location of the engine cylinder head as references in making these measurements. This, in my opinion, is completely erroneous, at least as far as being meaningful in any way, and particularly for use in comparing various designs. I feel moments should be measured from a point where a center of force is acting to the C.G. of the complete airplane. In the case of the tail moment, it would be measured from the center of pressure (or center of lift) of the horizontal stab and elevator combination (or the vertical stab and rudder combination if you are interested in the tail moment in yaw) to the C.G. The center of pressure for the stab and elevator combination is generally fairly close to the thickest part of the average area chord and tends to move rearward toward the hinge line when the elevator is used. The nose moment should be measured from the prop line to the C.G.

One unusual item relative to the rest of the Mach 1's configuration is its C.G. placement. I usually run my C.G. forward as far as possible without losing any of the airplane's tracking ability. In the case of the Mach 1, this turned out to be somewhat farther forward than any other design I've used to date. This kind of C.G. placement seems to cause dampening in all axes, particularly pitch. This is the reason for the Mach 1's fairly large elevator. As a result of this type of setup, the controls in all axis are quite soft, which means that fairly large control movements are generally required to perform the maneuvers. This takes a little getting used to at first, but in my opinion, is worth it.

So much for the thoughts that went into the development of the Mach 1 design. Let's now take a look at its construction, primarily as it pertains to the method used in building the fuselage straight without the use of a jig of any kind.

CONSTRUCTION  
All that is required is a good flat surface 60" or so long to mount a **DocuFreezer** also

**Guillow's**  
KILN DRIED · SUPER QUALITY  
**BALSA WOOD**

**BALSA GLIDERS**

**BALSA MODEL KITS**

**PAUL K. GUILLOW, INC.**  
WAKEFIELD, MASS. 01880



THE LARGEST MODEL AND CRAFT SHOW IN THE NATION.  
**SECOND ANNUAL MODEL AND CRAFT SHOW**

PRESENTED BY  
**THE ORANGE COAST RADIO CONTROL CLUB AND  
 THE SOUTHERN CALIFORNIA HOBBY INDUSTRY ASSOCIATION.**  
**JUNE 29th, 30th-JULY 1st, 1973**

Thousands of the Latest Products in Radio Control, Static Models, Crafts, Railroading and Ceramics on Display.

- Make & Take Crafts
- R/C Demonstrations
- Model Contests (Open to Public)
- Static Displays
- Prizes
- Trophies & Awards

**Show Hours:** Friday 10:00 A.M.-2:00 P.M. (Dealers Only)  
 2:00 P.M.-9:00 P.M.  
 Saturday 11:00 A.M.-9:00 P.M.  
 Sunday 11:00 A.M.-6:00 P.M.

For Further Information Phone (714) 534-0420 or (714) 531-4787

**ANAHEIM CONVENTION CENTER**  
 800 W. Katella Ave., Anaheim, Ca. 92802



problem is to make sure the hinge lines are all absolutely tight. Actually putting a web across the hinge line is a good idea and is done on some full size aircraft. I shape the leading edge of all my control surfaces to an accurate "v" and hinge them absolutely tight so that they pivot around the apex of the "v."

One problem relative to trimming out the Mach 1 is that it is easily built and finished too light. I've built two of them which came out just under seven lbs. and in both cases found their performance to be superior when they grossed out between 7-3/4 and 8-1/4 lbs. It is my personal belief that each design generally has an ideal gross weight at which the airplane's performance will be at a maximum. While I prefer to fly the Mach 1 at eight lbs., I have flown two of them that were excellent at nine lbs.

When the Mach 1 is set up properly, the controls should feel soft in all axes. No more control movement should be used than is just necessary to do the maneuvers. Sensitive controls are of little value in trying to perform smooth and graceful maneuvers. For this reason I usually set the rudder throw up so that full rudder is just the right amount for the slow and four point roll. The elevator is set up so that full throw is just enough to do reliable spins. And the ailerons are adjusted so that full throw produces just enough roll for the vertical parts of the Top Hat. No differential is used.

Of course, in addition to having a good airplane which has been properly trimmed out, competition flying also requires a lot of the right sort of practice. One of the problems

with contest flying is that you are never warmed up when it is your turn to fly. Either it's the first flight of the day for you or it's been at least a couple of hours since the last one in the previous round. In an effort to take care of this problem, I've developed a method of practicing which I think is really the right way of preparing for a contest. I call it, as you might guess, practicing cold. All it means is that when I go out to practice, I concentrate on trying to make the first flight a good one. In a sense, I practice flying well without practice. As a result, I usually limit my practice sessions to one or sometimes two flights. If I do fly a second flight, it's usually to try the pattern in a different direction relative to the wind. It may sound as though I don't practice much, but actually I do - it's just that I don't do much of it at one time. I'd much prefer to fly once every day than a couple of dozen times on the weekend. In this way, I think the condition in contest flying of having to fly without being warmed up is simulated to a certain extent in practice. If you can develop the ability to make your first flight a good one, then you'll have the rest of the fellows at a contest trying to catch you instead of you trying to catch them. Moreover, I think this type of practicing tends to result in a lot more consistency in one's flying.

Flying one flight after another in practice, is, in my opinion, of little value in preparation for a contest. However, it is good in the beginning when you are trying to get used to an airplane or to learn how to do the maneuvers. Although, once you've attained a

fair level of proficiency, I think it's a good idea to restrict your preparation for contests to practicing cold.

Well, that's about it. I've covered everything from the design of the Mach 1 to practicing with the Mach 1. Should you decide to build the Mach 1, I hope you will enjoy its many fine flying characteristics. ■

A KRAFTSmanship kit processed with AAMCO GOLD BALSAs -



\$21.95

Wing Span 50"  
 Wing Area 425"  
 Engines 15 - 35  
 Weight 3-4 lbs.

Fast Box-Lok construction -  
 A must for the beginner -

*The GREATEST R/C "BASIC TRAINER" Design & Kit of ALL TIME*

We Humbly Say No More - Andrews Aircraft Model Co., Inc. 9 Centre St

