

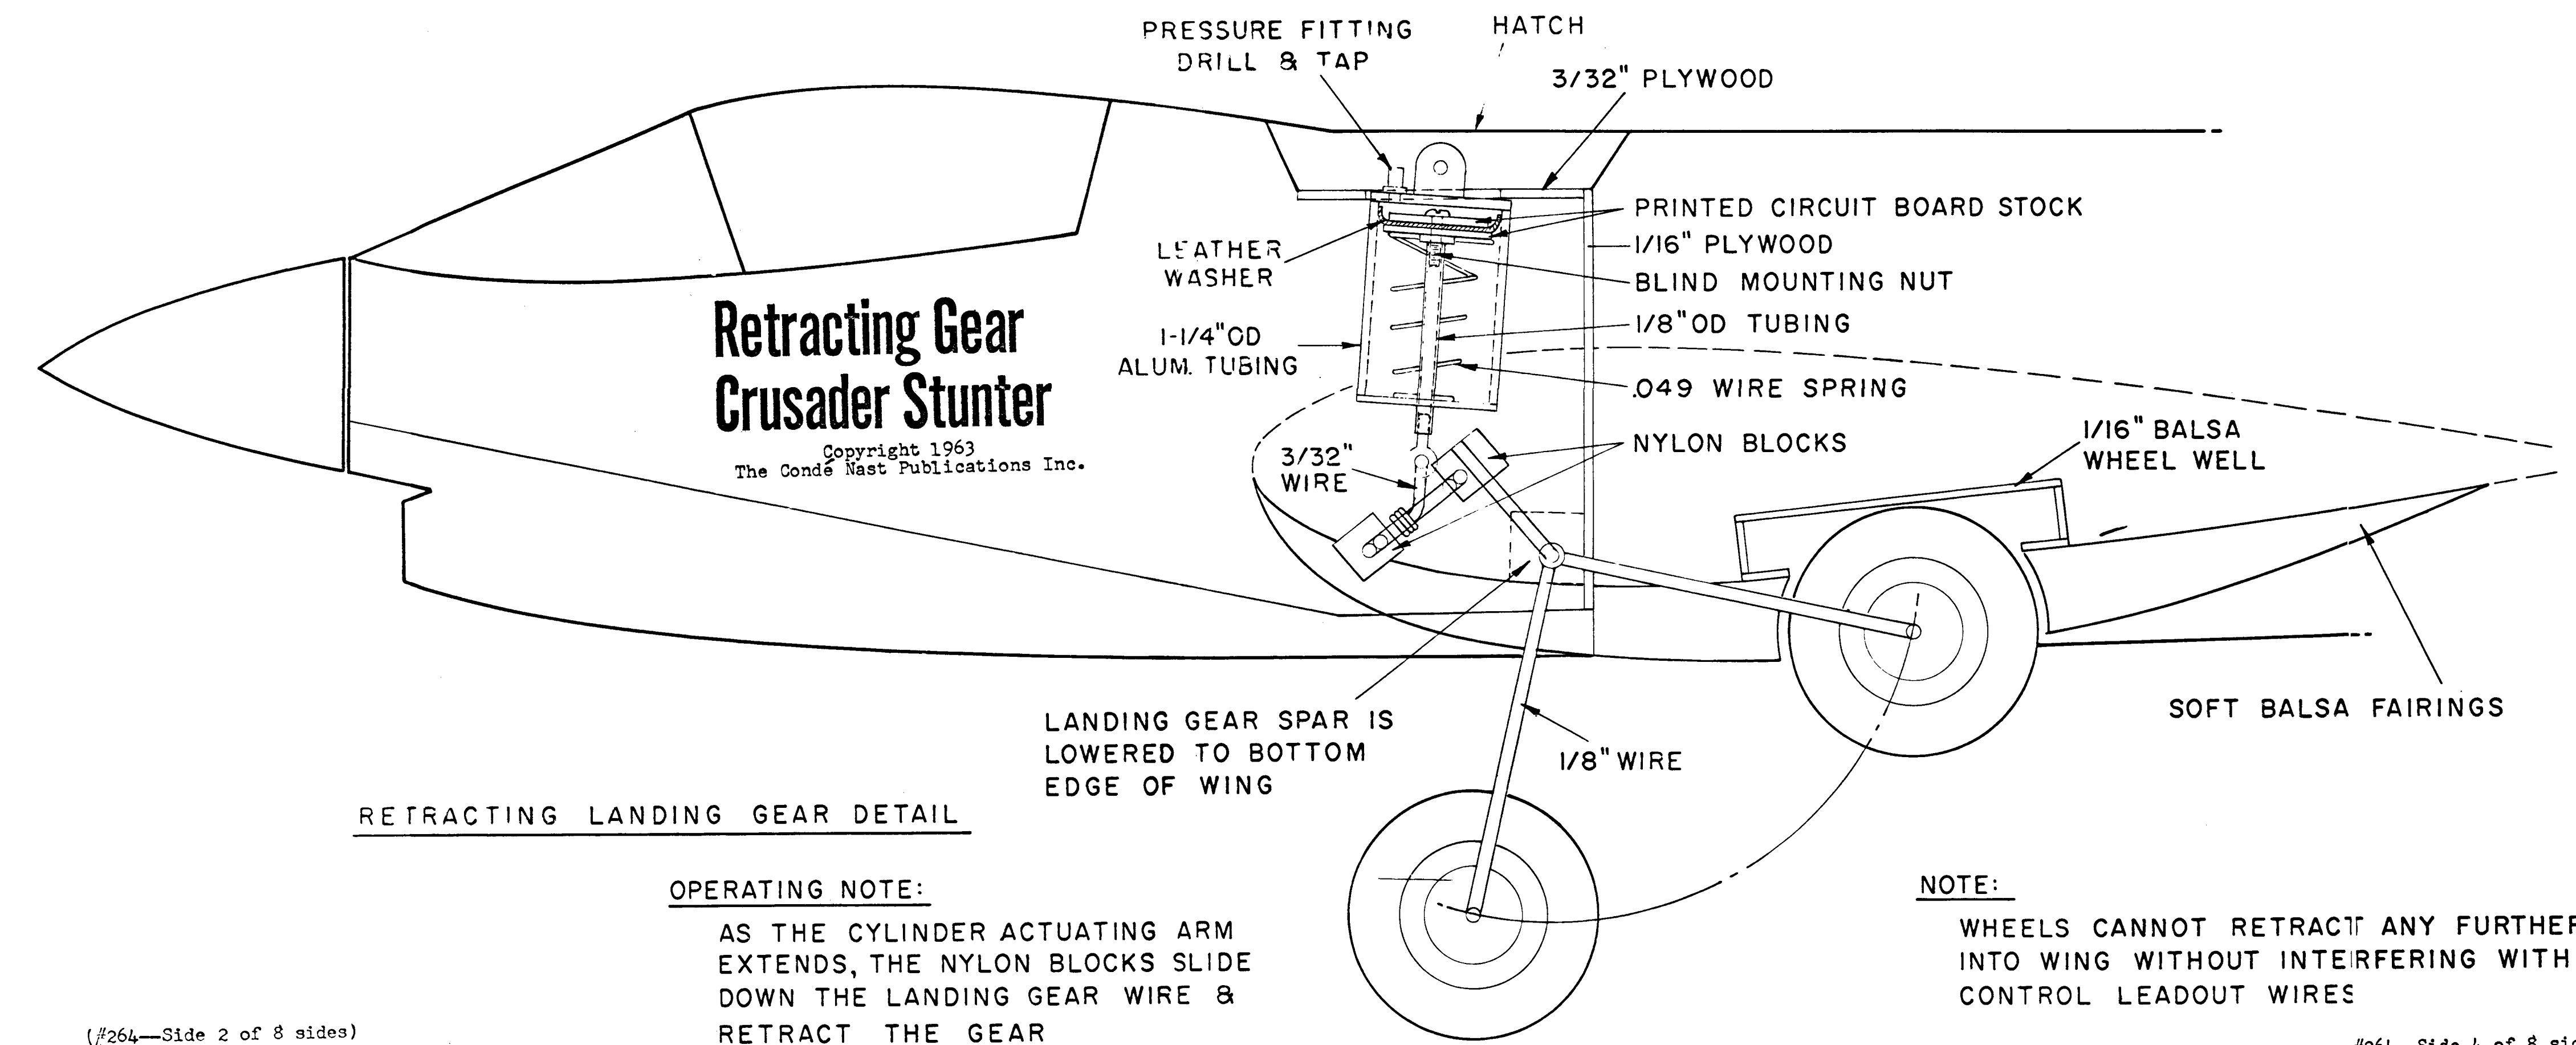
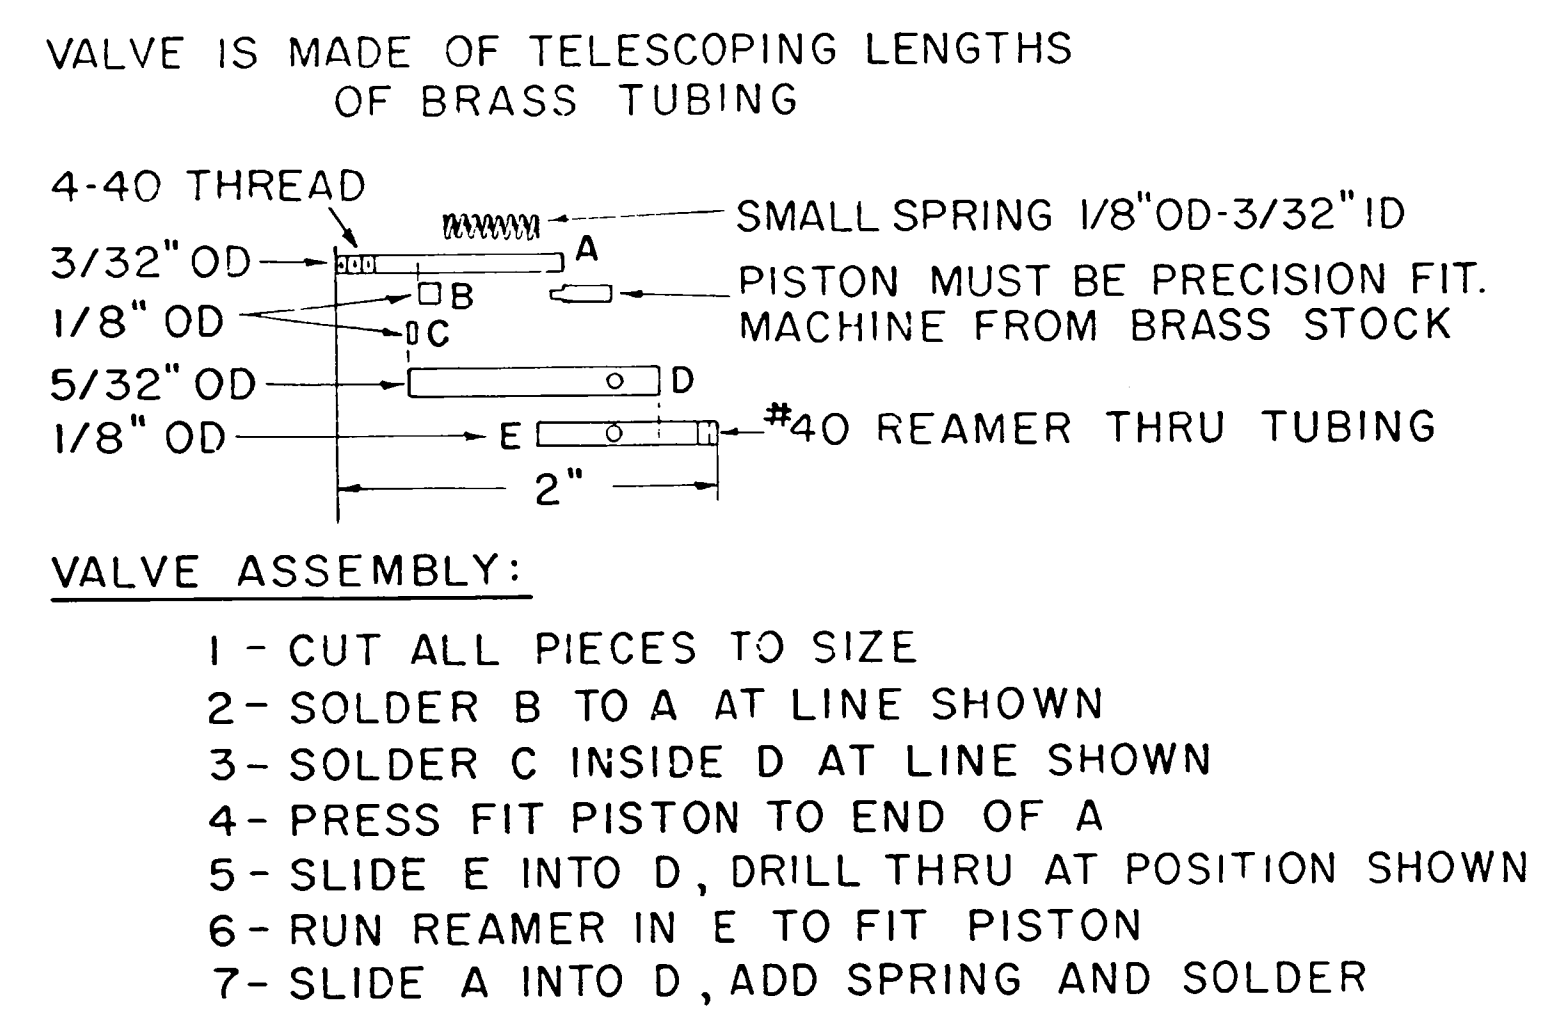
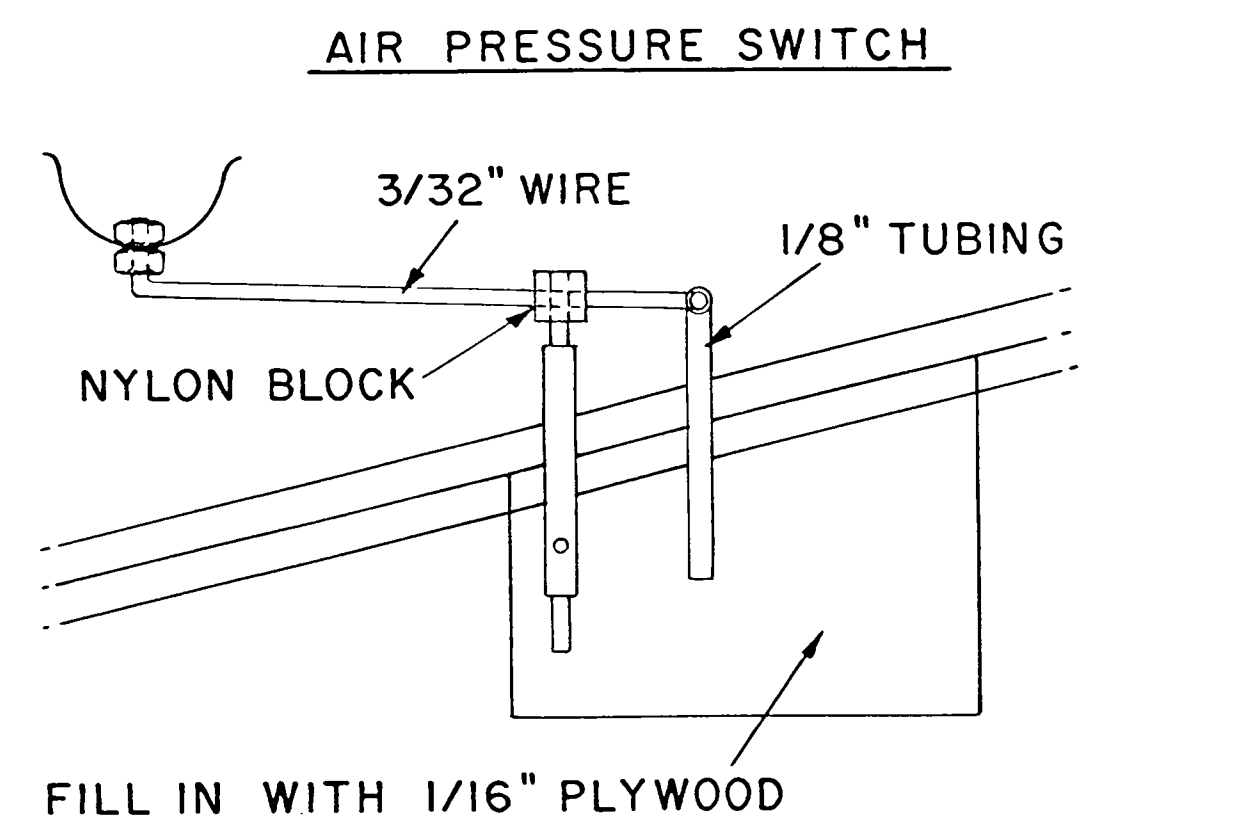
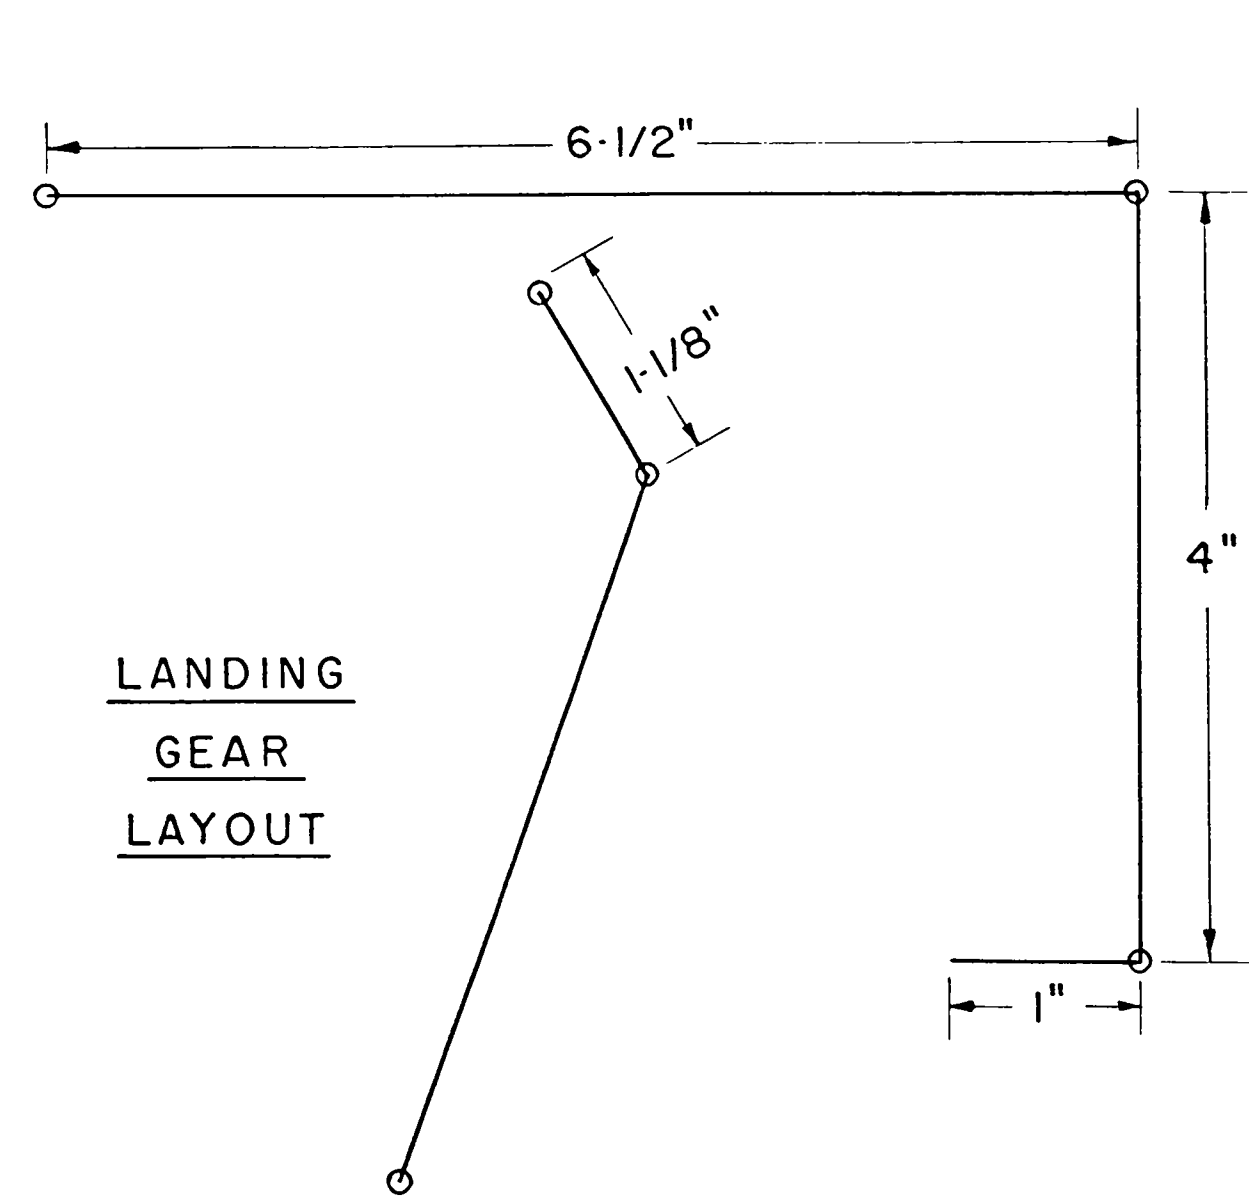




OPERATING NOTE:
AS THE CYLINDER ACTUATING ARM EXTENDS, THE NYLON BLOCKS SLIDE DOWN THE LANDING GEAR WIRE & RETRACT THE GEAR

NOTE:
WHEELS CANNOT RETRACT ANY FURTHER INTO WING WITHOUT INTERFERING WITH CONTROL LEADOUT WIRES

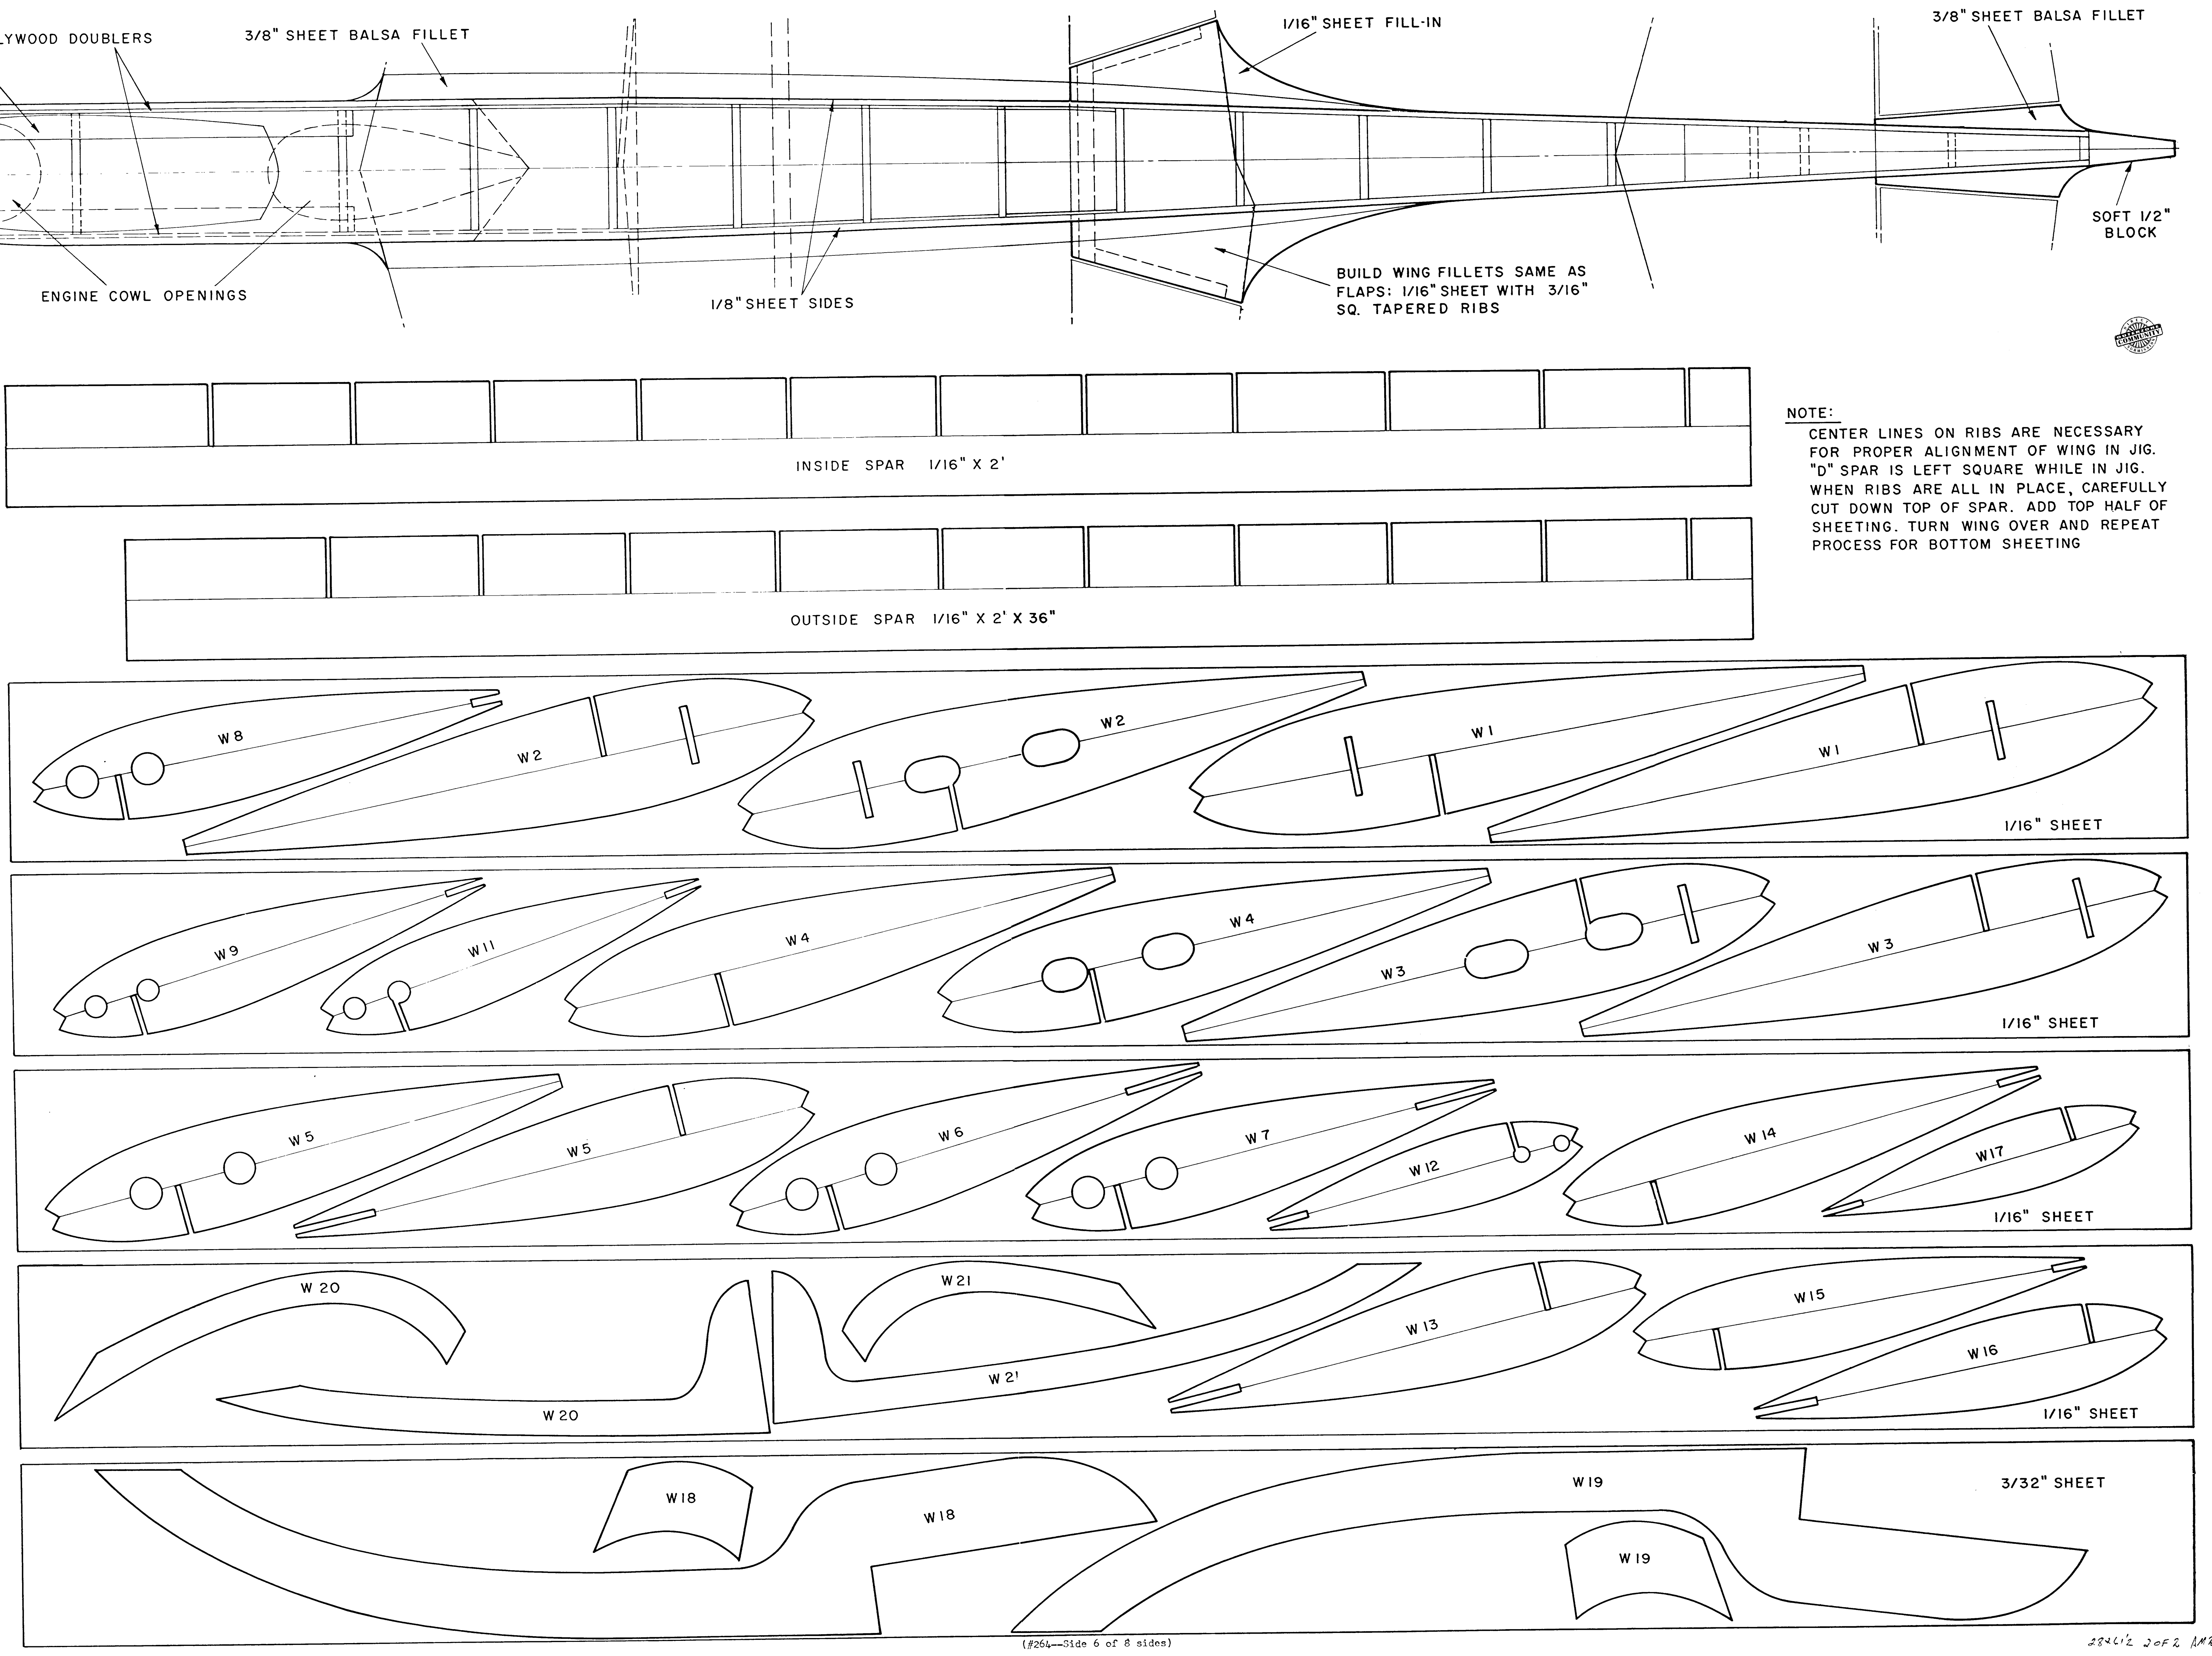

NOTE:
CENTER LINES ON RIBS ARE NECESSARY FOR PROPER ALIGNMENT OF WING IN JIG. "D" SPAR IS LEFT SQUARE WHILE IN JIG. WHEN RIBS ARE ALL IN PLACE, CAREFULLY CUT DOWN TOP OF SPAR. ADD TOP HALF OF SHEETING. TURN WING OVER AND REPEAT PROCESS FOR BOTTOM SHEETING

